

TXC2 - 15 M

1 2 3

1 BASIC PART NUMBER

TXC2 Straight EMI/RFI env. backshell (self-locking)


TXC4 90° EMI/RFI env. backshell (self-locking)

2 SHELL SIZE

See Backshell Dimensions table below

3 MATERIAL & FINISH

GM Composite, electroless nickel

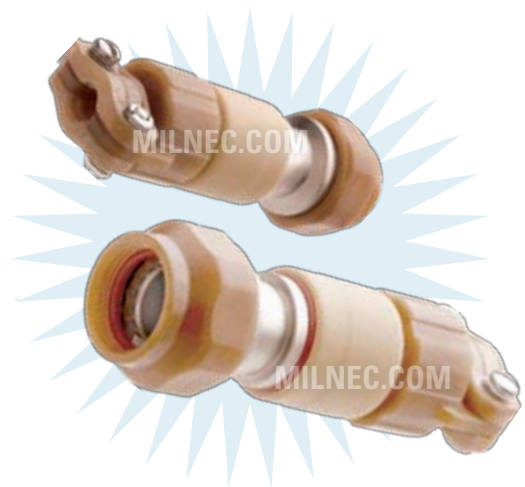

Note: See part builder (p. B-17) for additional kit options.



TXC2 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

Backshell Dimensions

Shell Size	Military Shell Size	V Thread Class 2B	D	B	R	N	T	E	U	L	CC Cable Clearance	
											Min	Max
9	A	M12 X 1-6H	.858 (21.8)	.940 (23.9)	.880 (22.4)	.690 (17.5)	1.060 (26.9)	.750 (19.1)	.800 (20.3)	2.500 (63.5)	.130 (3.3)	.250 (6.4)
11	B	M15 X 1-6H	.984 (25.0)	1.170 (29.7)	1.000 (25.4)	.750 (19.1)	1.130 (28.7)	.750 (19.1)	.930 (23.6)	2.500 (63.5)	.250 (6.4)	.380 (9.7)
13	C	M18 X 1-6H	1.157 (29.4)	1.280 (32.5)	1.130 (28.7)	.810 (20.6)	1.190 (30.2)	.750 (19.1)	1.060 (26.9)	2.500 (63.5)	.310 (7.9)	.440 (11.2)
15	D	M22 X 1-6H	1.279 (32.5)	1.410 (35.8)	1.310 (33.3)	.880 (22.4)	1.250 (31.8)	.750 (19.1)	1.220 (31.0)	2.500 (63.5)	.500 (12.7)	.630 (15.9)
17	E	M25 X 1-6H	1.406 (35.7)	1.500 (38.1)	1.380 (35.1)	.940 (23.9)	1.310 (33.3)	.750 (19.1)	1.240 (31.5)	2.500 (63.5)	.560 (14.2)	.690 (17.5)
19	F	M28 X 1-6H	1.516 (38.5)	1.560 (39.6)	1.440 (36.6)	.970 (24.6)	1.340 (34.0)	.750 (19.1)	1.370 (34.8)	2.500 (63.5)	.630 (16.0)	.750 (19.1)
21	H	M31 X 1-6H	1.642 (41.7)	1.690 (42.9)	1.630 (41.4)	1.060 (26.9)	1.440 (36.6)	.750 (19.1)	1.490 (37.8)	2.500 (63.5)	.750 (19.1)	.880 (22.2)
23	G	M34 X 1-6H	1.768 (44.9)	1.810 (46.0)	1.750 (44.5)	1.130 (28.7)	1.500 (38.1)	.750 (19.1)	1.620 (41.1)	2.500 (63.5)	.880 (22.4)	1.000 (25.4)
25	J	M37 X 1-6H	1.889 (48.0)	1.910 (48.5)	1.880 (47.8)	1.190 (30.2)	1.560 (39.6)	.750 (19.1)	1.680 (42.7)	2.500 (63.5)	1.000 (25.4)	1.130 (28.6)

Dimensions are in inches (mm).

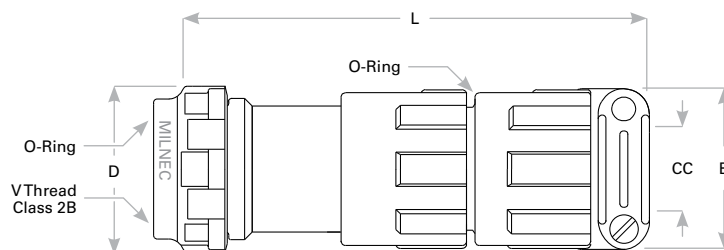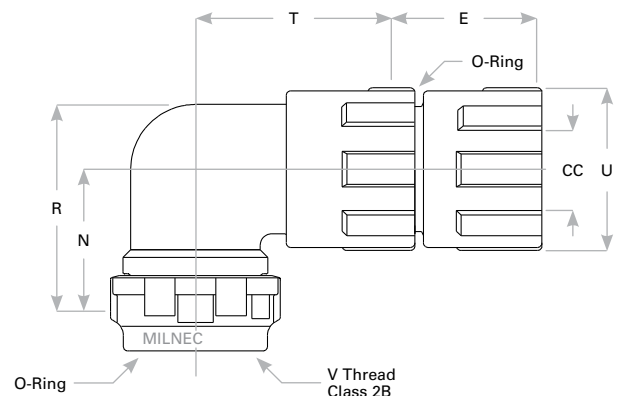

Rev. 1301.1