


## TXCD - 15 G - 03

- 1 **BASIC PART NUMBER**  
TXCD Stowage receptacle
- 2 **SHELL SIZE**  
See Stowage Receptacle Dimensions table below
- 3 **MATERIAL & FINISH**  
G Aluminum, electroless nickel (space-grade)
- 4 **OPTIONAL ACCESSORY KIT (OMIT FOR NONE)**  
02 Protective cover + mounting gasket  
03 02 kit + mounting bracket + sealing screws

\* Please consult an authorized distributor for lead time and minimum quantity requirements.

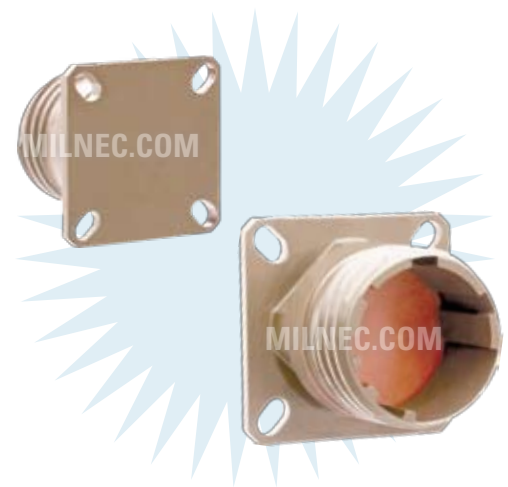

**Note:** See part builder (p. B-17) for additional kit options.




### TXCD Compatibility

| Compatible Brands        | Plugs                      |
|--------------------------|----------------------------|
| MIL-DTL-38999 Series III | D38999/26                  |
| Aero / Conesys           | AE326                      |
| Amphenol                 | TV06, TVS06, CTV06, CTVS06 |
| Deutsch                  | DTS26                      |
| ITT Cannon               | KJA6                       |
| Souriau                  | 8D5, 8DS06G                |

### Stowage Receptacle Dimensions

| Shell Size | Military Shell Size | W            | ZZ         | Z          | C Thread Class 2A   | R           | F          | P Max Rear Panel* | R1           | R2           | H            |
|------------|---------------------|--------------|------------|------------|---------------------|-------------|------------|-------------------|--------------|--------------|--------------|
| 9          | A                   | .938 (23.8)  | .216 (5.5) | .128 (3.3) | .6250-0.1P-0.3L-TS  | .822 (20.9) | .098 (2.5) | .234 (5.9)        | .719 (18.3)  | .594 (15.1)  | .656 (16.7)  |
| 11         | B                   | 1.031 (26.2) | .194 (4.9) | .128 (3.3) | .7500-0.1P-0.3L-TS  | .822 (20.9) | .098 (2.5) | .234 (5.9)        | .812 (20.6)  | .719 (18.3)  | .796 (20.2)  |
| 13         | C                   | 1.125 (28.6) | .194 (4.9) | .128 (3.3) | .8750-0.1P-0.3L-TS  | .822 (20.9) | .098 (2.5) | .234 (5.9)        | .906 (23.0)  | .812 (20.6)  | .922 (23.4)  |
| 15         | D                   | 1.219 (31.0) | .173 (4.4) | .128 (3.3) | 1.0000-0.1P-0.3L-TS | .822 (20.9) | .098 (2.5) | .234 (5.9)        | .969 (24.6)  | .906 (23.0)  | 1.047 (26.6) |
| 17         | E                   | 1.312 (33.3) | .194 (4.9) | .128 (3.3) | 1.1875-0.1P-0.3L-TS | .822 (20.9) | .098 (2.5) | .234 (5.9)        | 1.062 (27.0) | .969 (24.6)  | 1.219 (31.0) |
| 19         | F                   | 1.438 (36.5) | .194 (4.9) | .128 (3.3) | 1.2500-0.1P-0.3L-TS | .822 (20.9) | .098 (2.5) | .234 (5.9)        | 1.156 (29.4) | 1.062 (27.0) | 1.297 (32.9) |
| 21         | G                   | 1.562 (39.7) | .194 (4.9) | .128 (3.3) | 1.3750-0.1P-0.3L-TS | .791 (20.1) | .125 (3.2) | .234 (5.2)        | 1.250 (31.8) | 1.156 (29.4) | 1.422 (36.1) |
| 23         | H                   | 1.688 (42.9) | .242 (6.1) | .154 (3.9) | 1.5000-0.1P-0.3L-TS | .791 (20.1) | .125 (3.2) | .234 (5.2)        | 1.375 (34.9) | 1.250 (31.8) | 1.547 (39.3) |
| 25         | J                   | 1.812 (46.0) | .242 (6.1) | .154 (3.9) | 1.6250-0.1P-0.3L-TS | .791 (20.1) | .125 (3.2) | .234 (5.2)        | 1.500 (38.1) | 1.375 (34.9) | 1.672 (42.5) |

Dimensions are in inches (mm). \* Max panel thickness applies only to rear mount applications to ensure proper coupling clearance.

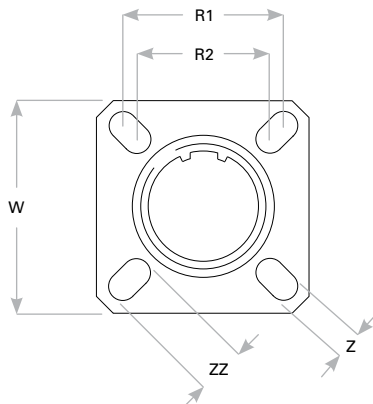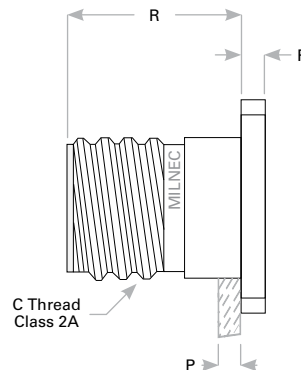

#### Panel Cutout

Kits with 03 accessory option will use R1 mounting hole positions.