


HSCD - 14 F - 03

- 1 **BASIC PART NUMBER**
HSCD Stowage receptacle
- 2 **SHELL SIZE**
See Stowage Receptacle Dimensions table below
- 3 **MATERIAL & FINISH**
F Aluminum, olive drab cadmium
- 4 **OPTIONAL ACCESSORY KIT (OMIT FOR NONE)**
02 Protective cover + mounting gasket
03 02 kit + mounting bracket + sealing screws

Note: See part builder (p. B-11) for additional kit options.

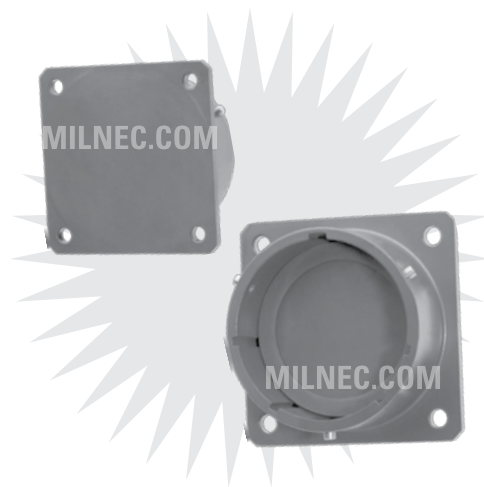




Stow your cable while protecting your plug

Prevent operator injury or connector damage by providing a safe place to stow and organize your unused cables. Protective covers are recommended to always keep stowage receptacles clean and dry.

Stowage Receptacle Dimensions

Shell Size	W	Z	L	R	M	F	P Max Rear Panel†	S	X	H
8	.828 (21.0)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.471 (12.0)	.062 (1.6)	.125 (3.2)	.594 (15.1)	.120 (3.1)	.449 (11.4)
10	.954 (24.2)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.588 (14.9)	.062 (1.6)	.125 (3.2)	.719 (18.3)	.120 (3.1)	.573 (14.6)
12	1.047 (26.6)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.748 (19.0)	.062 (1.6)	.125 (3.2)	.812 (20.6)	.120 (3.1)	.699 (17.8)
14	1.141 (29.0)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.873 (22.2)	.062 (1.6)	.125 (3.2)	.906 (23.0)	.120 (3.1)	.823 (20.9)
16	1.234 (31.3)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.998 (25.3)	.062 (1.6)	.125 (3.2)	.969 (24.6)	.120 (3.1)	.949 (24.1)
18	1.328 (33.7)	.120 (3.0)	.540 (13.8)	.478 (12.2)	1.123 (28.5)	.062 (1.6)	.125 (3.2)	1.062 (27.0)	.120 (3.1)	1.073 (27.3)
20	1.453 (36.9)	.120 (3.0)	.666 (16.9)	.572 (14.5)	1.248 (31.7)	.094 (2.4)	.250 (6.4)	1.156 (29.4)	.120 (3.1)	1.199 (30.5)
22	1.578 (40.1)	.120 (3.0)	.666 (16.9)	.572 (14.5)	1.373 (34.9)	.094 (2.4)	.250 (6.4)	1.250 (31.8)	.120 (3.1)	1.323 (33.6)
24	1.703 (43.3)	.147 (3.7)	.699 (17.8)	.605 (15.4)	1.498 (38.0)	.094 (2.4)	.250 (6.4)	1.375 (34.9)	.147 (3.7)	1.449 (36.8)

Dimensions are in inches (mm). † Max panel thickness applies only to rear mount applications to ensure proper coupling clearance.

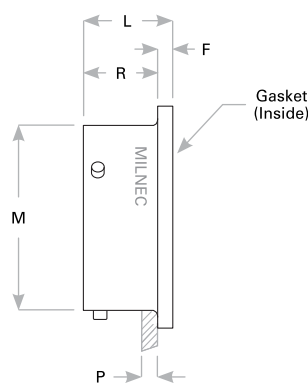

Panel Cutout