

PS08 F 20-29 S N - 01

- 1 **BASIC PART NUMBER**
PS08 90° plug w/ integrated backshell
- 2 **MATERIAL & FINISH**
F Aluminum, olive drab cadmium
- 3 **SHELL SIZE & INSERT ARRANGEMENT**
See Insert Arrangement Selection table, p. C-14
- 4 **CONTACT STYLE**
P Pin
S Socket
- 5 **INSERT ROTATION**
N Normal or W, X, Y, Z, see p. C-14 for availability
- 6 **OPTIONAL ACCESSORY KIT (OMIT FOR NONE)**
01 Protective cover + cable bushing

Note: See part builder (p. C-13) for additional kit options.



**Plugs for receptacles in confined spaces**

A 90° plug is recommended for connections in difficult locations. Angled plugs may also be used to provide simple cable management in high-density panels. An integrated backshell provides environmental sealing and strain relief. A protective cover is recommended when not in use.

Plug Dimensions

Shell Size	D	C Thread Class 2B	L ¹	L ²	N	B	CC Cable Clearance
10SL	.946 (24.0)	.6250-24 NEF	1.482 (37.6)	1.508 (38.3)	.531 (13.5)	.901 (22.9)	.311 (7.9)
12S	.995 (25.3)	.7500-20 UNEF	1.487 (37.8)	1.508 (38.3)	.531 (13.5)	.901 (22.9)	.311 (7.9)
14S	1.123 (28.5)	.8750-20 UNEF	1.551 (39.4)	1.570 (39.9)	.531 (13.5)	1.026 (26.1)	.437 (11.1)
16S	1.250 (31.8)	1.0000-20 UNEF	1.677 (42.3)	1.633 (41.5)	.531 (13.5)	1.119 (28.4)	.559 (14.2)
16	1.250 (31.8)	1.1000-20 UNEF	2.052 (52.1)	1.633 (41.5)	.719 (18.3)	1.119 (28.4)	.559 (14.2)
18	1.333 (33.9)	1.1250-18 UNEF	2.114 (53.7)	1.759 (44.7)	.719 (18.3)	1.229 (31.2)	.622 (15.8)
20	1.461 (37.1)	1.2500-18 UNEF	2.317 (58.9)	1.931 (49.0)	.719 (18.3)	1.479 (37.6)	.748 (19.0)
22	1.588 (40.3)	1.3750-18 UNEF	2.317 (58.9)	1.993 (50.6)	.719 (18.3)	1.479 (37.6)	.748 (19.0)
24	1.729 (43.9)	1.5000-18 UNEF	2.505 (63.6)	2.119 (53.8)	.719 (18.3)	1.666 (42.3)	.933 (23.7)
28	1.968 (50.0)	1.7500-18 UNS	2.505 (63.6)	2.181 (55.4)	.719 (18.3)	1.666 (42.3)	.933 (23.7)
32	2.0000-18NS	2.209 (56.1) UNS	2.739 (69.6)	2.570 (65.3)	.719 (18.3)	2.135 (54.2)	1.252 (31.8)
36	2.2500-16UN	2.463 (62.6) UN	2.864 (72.7)	2.695 (68.5)	.719 (18.3)	2.260 (57.4)	1.362 (34.6)

Dimensions are in inches (mm).

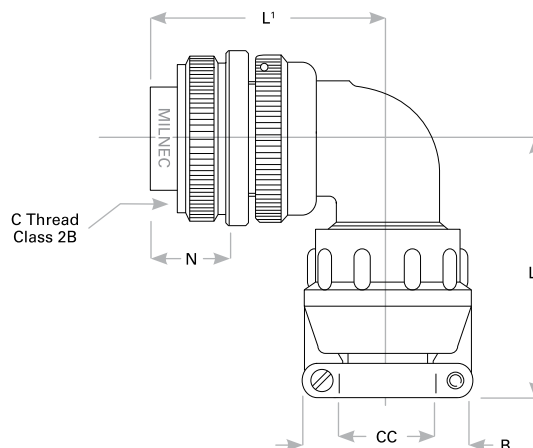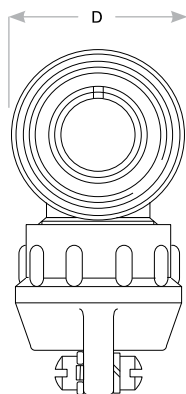

Rev. 1112.1