

M28840 90° EMI/Environmental Backshell

NS Series • MIL-DTL-28840 Type Connectors




NSR4 - 009 W

- 1 **BASIC PART NUMBER**
NSR4 90° EMI/environmental backshell
- 2 **DASH NO.**
See Backshell Dimensions table below
- 3 **MATERIAL & FINISH**
W Aluminum, olive drab cadmium
D Stainless steel, black cadmium plate

Note: See part builder (p. Z-7) for additional kit options.

NSR4 Compatibility

Compatible Brands	Connectors
MIL-DTL-28840	M28840/10, M28840/11, M28840/14, M28840/16

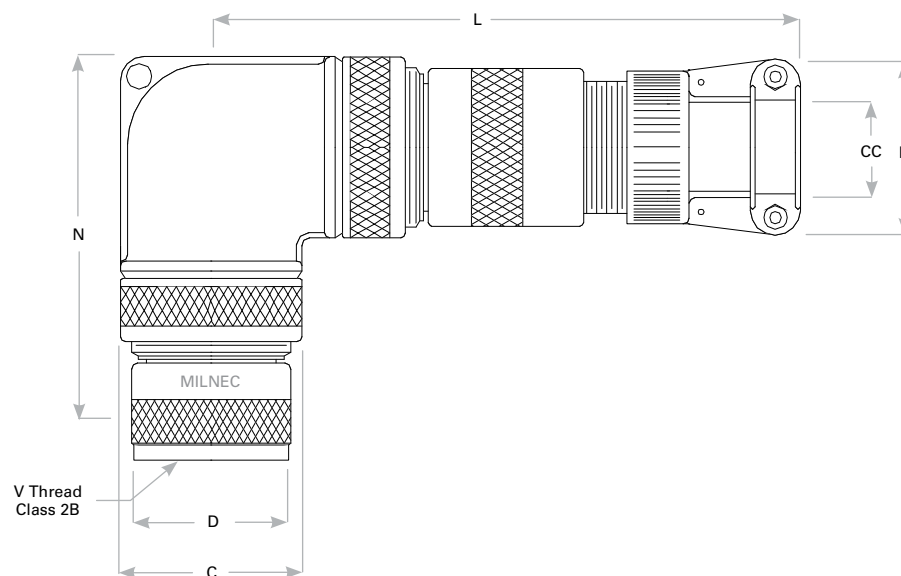

Backshell Dimensions

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	L Max	N Max	D Max	C Max	B	CC Cable Clearance	
									Min	Max
001	11	A	.750-20 UNEF	5.332 (135.4)	2.614 (66.4)	1.028 (26.1)	1.188 (30.2)	.938 (23.8)	.188 (4.8)	.312 (7.9)
002	11	A	.750-20 UNEF	5.332 (135.4)	2.614 (66.4)	1.028 (26.1)	1.188 (30.2)	1.125 (28.6)	.281 (7.1)	.438 (11.1)
003	11	A	.750-20 UNEF	5.457 (138.6)	2.864 (72.8)	1.028 (26.1)	1.438 (36.5)	1.312 (33.3)	.344 (8.7)	.562 (14.3)
004	13	B	.875-20 UNEF	5.332 (135.4)	2.614 (66.4)	1.141 (29.0)	1.188 (30.2)	.938 (23.8)	.188 (4.8)	.312 (7.9)
005	13	B	.875-20 UNEF	5.332 (135.4)	2.614 (66.4)	1.141 (29.0)	1.188 (30.2)	1.125 (28.6)	.281 (7.1)	.438 (11.1)
006	13	B	.875-20 UNEF	5.457 (138.6)	2.864 (72.8)	1.141 (29.0)	1.438 (36.5)	1.312 (33.3)	.344 (8.7)	.562 (14.3)
007	13	B	.875-20 UNEF	5.682 (144.3)	3.114 (79.1)	1.141 (29.0)	1.688 (42.9)	1.312 (33.3)	.375 (9.5)	.625 (15.9)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1825

M28840 90° EMI/Environmental Backshell

NS Series • MIL-DTL-28840 Type Connectors

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	L Max	N Max	D Max	C Max	B	CC Cable Clearance	
									Min	Max
008	15	C	1.000-20 UNEF	5.457 (138.6)	2.864 (72.7)	1.263 (32.1)	1.438 (36.5)	.938 (23.8)	.188 (4.8)	.312 (7.9)
009	15	C	1.000-20 UNEF	5.457 (138.6)	2.864 (72.7)	1.263 (32.1)	1.438 (36.5)	1.125 (28.6)	.281 (32.5)	.438 (11.1)
010	15	C	1.000-20 UNEF	5.457 (138.6)	2.864 (72.7)	1.263 (32.1)	1.438 (36.5)	1.312 (33.3)	.344 (8.7)	.562 (14.3)
011	15	C	1.000-20 UNEF	5.682 (144.3)	3.114 (79.1)	1.263 (32.1)	1.688 (42.9)	1.593 (40.5)	.438 (11.1)	.750 (19.1)
012	15	C	1.000-20 UNEF	5.682 (144.3)	3.114 (79.1)	1.263 (32.08)	1.688 (42.9)	1.312 (33.3)	.375 (9.5)	.625 (15.9)
013	17	D	1.125-18 UNEF	5.682 (144.3)	3.114 (79.1)	1.387 (35.23)	1.688 (42.9)	1.312 (33.3)	.375 (9.5)	.625 (15.9)
014	17	D	1.125-18 UNEF	5.713 (145.1)	3.114 (79.1)	1.387 (35.23)	1.688 (42.9)	1.593 (40.5)	.438 (11.1)	.750 (19.1)
015	17	D	1.125-18 UNEF	5.807 (147.5)	3.114 (79.1)	1.387 (35.23)	1.688 (42.9)	1.750 (44.5)	.625 (15.9)	.938 (23.8)
016	19	E	1.250-18 UNEF	5.682 (144.3)	3.114 (79.1)	1.513 (38.43)	1.688 (42.9)	1.312 (33.3)	.375 (9.5)	.625 (15.9)
017	19	E	1.250-18 UNEF	5.832 (148.1)	3.364 (85.4)	1.513 (38.43)	1.938 (49.2)	1.750 (44.5)	.625 (15.9)	.938 (23.8)
018	23	F	1.438-18 UNEF	5.738 (145.7)	3.364 (85.4)	1.703 (45.51)	1.938 (49.2)	1.593 (40.5)	.438 (11.1)	.750 (19.1)
019	23	F	1.438-18 UNEF	5.832 (148.1)	3.364 (85.4)	1.703 (45.51)	1.938 (49.2)	1.750 (44.5)	.625 (15.9)	.938 (23.8)
020	23	F	1.438-18 UNEF	6.019 (152.9)	3.364 (85.4)	1.703 (45.51)	1.938 (49.2)	2.093 (53.2)	.812 (20.6)	1.188 (30.2)
021	25	G	1.562-18 UNEF	5.832 (148.1)	3.364 (85.4)	1.825 (46.35)	1.938 (49.2)	1.750 (44.5)	.625 (15.9)	.938 (23.8)
022	25	G	1.562-18 UNEF	6.019 (152.9)	3.364 (85.4)	1.825 (46.35)	1.938 (49.2)	2.093 (53.2)	.812 (20.6)	1.188 (30.2)
023	25	G	1.562-18 UNEF	6.144 (156.1)	3.614 (91.8)	1.825 (46.35)	2.188 (54.4)	2.093 (53.2)	.875 (22.2)	1.250 (31.8)
024	25	G	1.562-18 UNEF	6.176 (156.9)	3.614 (91.8)	1.825 (46.35)	2.188 (54.4)	2.343 (59.5)	1.000 (25.4)	1.380 (35.1)
025	29	H	1.875-16 UNS	6.144 (156.1)	3.614 (91.8)	2.143 (54.43)	2.188 (54.4)	2.093 (53.2)	.812 (20.6)	1.188 (30.2)
026	29	H	1.875-16 UNS	6.176 (156.9)	3.614 (91.8)	2.143 (54.43)	2.188 (54.4)	2.343 (59.5)	1.000 (25.4)	1.380 (35.1)
027	33	J	2.062-16 UNS	6.426 (163.2)	4.114 (104.5)	2.329 (59.16)	2.688 (68.3)	2.343 (59.5)	1.000 (25.4)	1.380 (35.1)
028	33	J	2.062-16 UNS	6.701 (170.2)	4.114 (104.5)	2.329 (59.16)	2.688 (68.3)	2.750 (69.9)	1.250 (31.8)	1.625 (41.3)

Dimensions are in inches (mm).