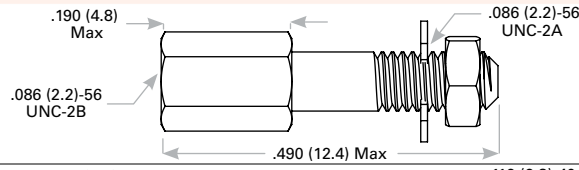
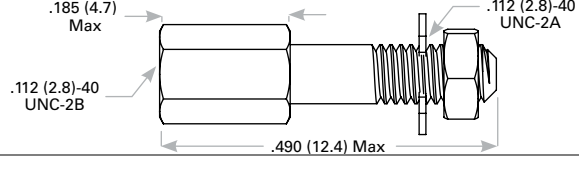
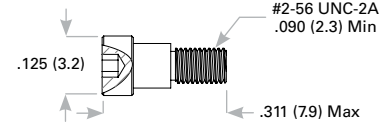
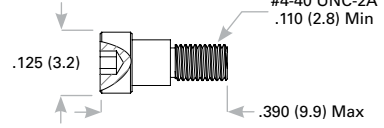
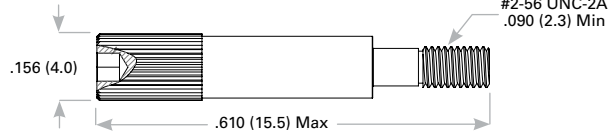
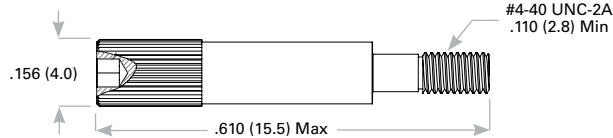


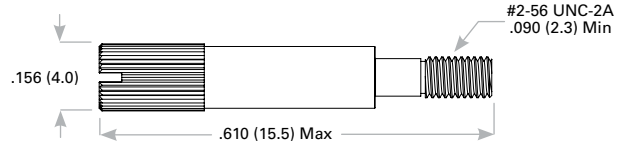
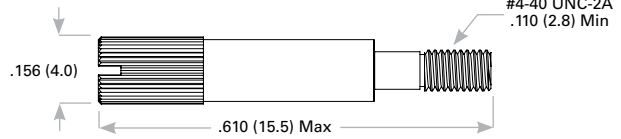


M83513/05 Type Micro-D Jackscrew Kits

Ry85049 Series • M85049 Type Backshells

Jackscrew Kits

Configuration	Size	Milnec Part Number	Dimensions
 Jackpost	9 to 69 Contacts #2-56 UNC	RY83513/05-07	 .190 (4.8) Max .086 (2.2)-56 UNC-2B .490 (12.4) Max .086 (2.2)-56 UNC-2A
	100 Contacts Only #4-40 UNC	RY83513/05-17	 .185 (4.7) Max .112 (2.8)-40 UNC-2B .490 (12.4) Max .112 (2.8)-40 UNC-2A
 Hex Head Jackscrew	9 to 69 Contacts #2-56 UNC	RY83513/05-02	 .125 (3.2) #2-56 UNC-2A .090 (2.3) Min .311 (7.9) Max
	100 Contacts Only #4-40 UNC	RY83513/05-12	 .125 (3.2) #4-40 UNC-2A .110 (2.8) Min .390 (9.9) Max
 Extended Hex Head Jackscrew	9 to 69 Contacts #2-56 UNC	RY83513/05-05	 .156 (4.0) #2-56 UNC-2A .090 (2.3) Min .610 (15.5) Max
	100 Contacts Only #4-40 UNC	RY83513/05-15	 .156 (4.0) #4-40 UNC-2A .110 (2.8) Min .610 (15.5) Max
 Slot Head Jackscrew	9 to 69 Contacts #2-56 UNC	RY83513/05-03	 .125 (3.2) #2-56 UNC-2A .090 (2.3) Min .390 (9.9) Max
	100 Contacts Only #4-40 UNC	RY83513/05-13	 .125 (3.2) #4-40 UNC-2A .110 (2.8) Min .390 (9.9) Max
 Extended Slot Head Jackscrew	9 to 69 Contacts #2-56 UNC	RY83513/05-06	 .156 (4.0) #2-56 UNC-2A .090 (2.3) Min .610 (15.5) Max
	100 Contacts Only #4-40 UNC	RY83513/05-16	 .156 (4.0) #4-40 UNC-2A .110 (2.8) Min .610 (15.5) Max

Rev. 1825