HRCD - 14 F - 03

1 2 3 4

1. **BASIC PART NUMBER**
   - **HRCD** Stowage receptacle
2. **SHELL SIZE**
   - See Stowage Receptacle Dimensions table below
3. **MATERIAL & FINISH**
   - **F** Aluminum, olive drab cadmium
4. **OPTIONAL ACCESSORY KIT** (OMIT FOR NONE)
   - **02** Protective cover + mounting gasket
   - **03** 02 kit + mounting bracket + sealing screws

Note: See part builder (p. U-8) for additional kit options.




HRCD Compatibility


Compatible Brands	Plugs
MIL-26482 Series 1 Crimp	MS3126
Amphenol	PT06SE, PT08SE
Array	PWF06, PWF08
ITT Cannon	KPSE06, KPSE08
Souriau	85106, 85108


Stowage Receptacle Dimensions

Shell Size	W	Z	L	R	M	F	P Max Rear Panel‡	S	X	H
8	.828 (21.0)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.471 (12.0)	.062 (1.6)	.125 (3.2)	.594 (15.1)	.120 (3.1)	.449 (11.4)
10	.954 (24.2)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.588 (14.9)	.062 (1.6)	.125 (3.2)	.719 (18.3)	.120 (3.1)	.573 (14.6)
12	1.047 (26.6)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.748 (19.0)	.062 (1.6)	.125 (3.2)	.812 (20.6)	.120 (3.1)	.699 (17.8)
14	1.141 (29.0)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.873 (22.2)	.062 (1.6)	.125 (3.2)	.906 (23.0)	.120 (3.1)	.823 (20.9)
16	1.234 (31.3)	.120 (3.0)	.540 (13.8)	.478 (12.2)	.998 (25.3)	.062 (1.6)	.125 (3.2)	.969 (24.6)	.120 (3.1)	.949 (24.1)
18	1.328 (33.7)	.120 (3.0)	.540 (13.8)	.478 (12.2)	1.123 (28.5)	.062 (1.6)	.125 (3.2)	1.062 (27.0)	.120 (3.1)	1.073 (27.3)
20	1.453 (36.9)	.120 (3.0)	.666 (16.9)	.572 (14.5)	1.248 (31.7)	.094 (2.4)	.250 (6.4)	1.156 (29.4)	.120 (3.1)	1.199 (30.5)
22	1.578 (40.1)	.120 (3.0)	.666 (16.9)	.572 (14.5)	1.373 (34.9)	.094 (2.4)	.250 (6.4)	1.250 (31.8)	.120 (3.1)	1.323 (33.6)
24	1.703 (43.3)	.147 (3.7)	.699 (17.8)	.605 (15.4)	1.498 (38.0)	.094 (2.4)	.250 (6.4)	1.375 (34.9)	.147 (3.7)	1.449 (36.8)

Dimensions are in inches (mm). ‡ Max panel thickness applies only to rear mount applications to ensure proper coupling clearance.



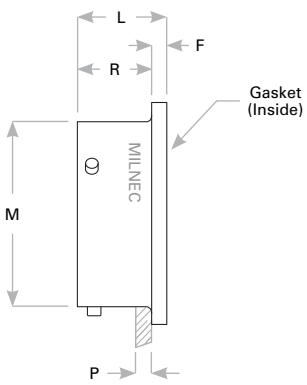



Panel Cutout

Rev. 1401.1