

TBCD - 15 W - 03

1 2 3 4

1 BASIC PART NUMBER

TBCD Stowage receptacle

2 SHELL SIZE

See Stowage Receptacle Dimensions table below

3 MATERIAL & FINISH

N Aluminum, electroless nickel
W Aluminum, olive drab cadmium
G Aluminum, electroless nickel (space-grade)
K* Stainless steel, passivated
L* Stainless steel, electrodeposited nickel

4 OPTIONAL ACCESSORY KIT (OMIT FOR NONE)

02 Protective cover + mounting gasket
03 02 kit + mounting bracket + sealing screws

* Please consult an authorized distributor for lead time and minimum quantity requirements.

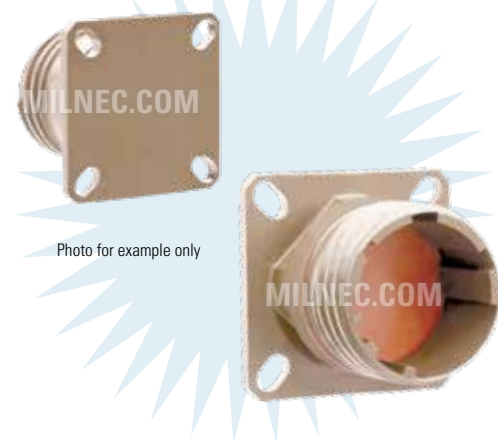


Photo for example only




TBCD Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series IV	D38999/46, D38999/47
G & H Tech / Cooper	BL06, BLG6
Deutsch	DIV/45, DIV/46

Stowage Receptacle Dimensions

Shell Size	Military Shell Size	W Max	Z	D Max	F	R	X	E
9	A	.950 (24.1)	.137 (3.5)	.384 (9.8)	.102 (2.6)	.656 (16.7)	.130 (3.3)	.681 (17.3)
11	B	1.051 (26.7)	.137 (3.5)	.509 (12.9)	.102 (2.6)	.812 (20.6)	.130 (3.3)	.806 (20.5)
13	C	1.145 (29.1)	.137 (3.5)	.634 (16.1)	.102 (2.6)	.906 (23.0)	.130 (3.3)	.932 (23.7)
15	D	1.240 (31.5)	.137 (3.5)	.759 (19.3)	.102 (2.6)	.969 (24.6)	.130 (3.3)	1.057 (26.8)
17	E	1.334 (33.9)	.137 (3.5)	.885 (22.5)	.102 (2.6)	1.062 (27.0)	.130 (3.3)	1.183 (30.0)
19	F	1.460 (37.1)	.137 (3.5)	1.009 (25.6)	.133 (3.4)	1.156 (29.4)	.130 (3.3)	1.307 (33.2)
21	G	1.582 (40.2)	.137 (3.5)	1.134 (28.8)	.133 (3.4)	1.250 (31.8)	.130 (3.3)	1.432 (36.4)
23	H	1.708 (43.4)	.157 (4.0)	1.259 (32.0)	.133 (3.4)	1.375 (34.9)	.130 (3.3)	1.557 (39.5)
25	J	1.834 (46.6)	.157 (4.0)	1.384 (35.2)	.133 (3.4)	1.500 (38.1)	.130 (3.3)	1.682 (42.7)

Dimensions are in inches (mm).

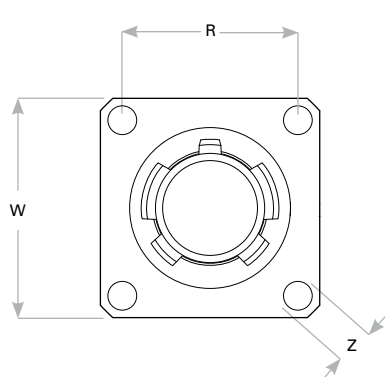

Panel Cutout