


## RSMB - 14 - A

- 1 **BASIC PART NUMBER**  
**RSMB** Mounting bracket, aluminum alloy with SST locking nuts
- 2 **SHELL SIZE**  
 See Bracket Dimensions table below
- 3 **OPTIONAL FASTENER KIT** (OMIT FOR NONE)  
**A** Self-sealing SST fillister head screws (4x)

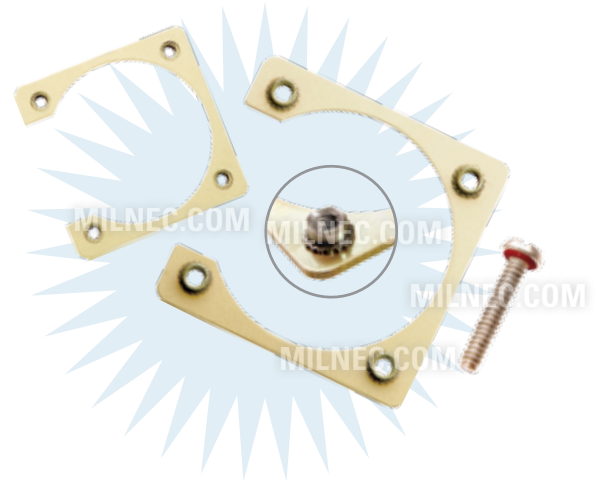

**Note:** See part builder (p. V-11) for additional kit options.


### RSMB Compatibility

Compatible Brands	Receptacles
<b>AS95234</b>	AS95234/2, AS95234/3, AS95234/4, AS95234/5, AS95234/6, AS95234/9
<b>VG95234</b>	VG95234 Receptacles
<b>Amphenol</b>	GTS00, GTS02, GTS030, GTC00, GTC02, GTC030, ACA3100-B, ACA3102-B, ACA3103-B, 97B-3100, 97B-3102, 97B-4100, 97B-4102
<b>ITT Cannon</b>	CA3100-B, CA3102-B, CB0, CB2
<b>Veam</b>	CIR00, CIR02, CIR030

### Bracket Dimensions

Shell Size	Screw Size	Y Thread UNJC-3B	W	S	T	H	N	F
10	4	4-40	1.019 (25.9)	.719 (18.3)	.433 (11.0)	.720 (18.3)	.136 (3.5)	.040 (1.0)
12	4	4-40	1.104 (28.0)	.812 (20.6)	.530 (13.5)	.855 (21.7)	.136 (3.5)	.040 (1.0)
14	4	4-40	1.198 (30.4)	.906 (23.0)	.624 (15.8)	.984 (25.0)	.136 (3.5)	.040 (1.0)
16	4	4-40	1.280 (32.5)	.969 (24.6)	.687 (17.4)	1.094 (27.8)	.136 (3.5)	.040 (1.0)
18	4	4-40	1.406 (35.7)	1.062 (27.0)	.780 (19.8)	1.220 (31.0)	.136 (3.5)	.040 (1.0)
20	4	4-40	1.535 (39.0)	1.156 (29.4)	.874 (22.2)	1.345 (34.2)	.136 (3.5)	.040 (1.0)
22	4	4-40	1.665 (42.3)	1.250 (31.8)	.968 (24.6)	1.478 (37.5)	.136 (3.5)	.040 (1.0)
24	6	6-32	1.738 (44.1)	1.375 (34.9)	.907 (23.0)	1.483 (37.7)	.153 (3.9)	.040 (1.0)
28	6	6-32	2.000 (50.8)	1.562 (39.7)	1.125 (28.6)	1.820 (46.2)	.153 (3.9)	.040 (1.0)
32	6	6-32	2.312 (58.7)	1.750 (44.5)	1.188 (30.2)	2.062 (52.4)	.153 (3.9)	.040 (1.0)
36	6	6-32	2.500 (63.5)	1.938 (49.2)	1.375 (34.9)	2.312 (58.7)	.153 (3.9)	.040 (1.0)

Dimensions are in inches (mm).

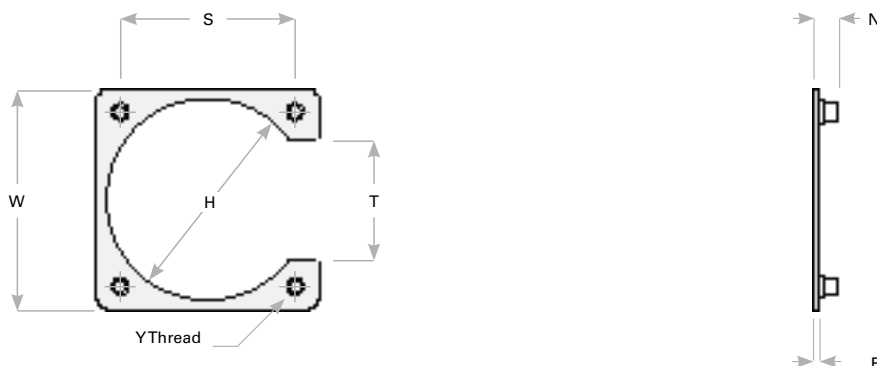

Rev. 1832