


# Mounting Gasket

PS Series • High-Performance Solder Connectors

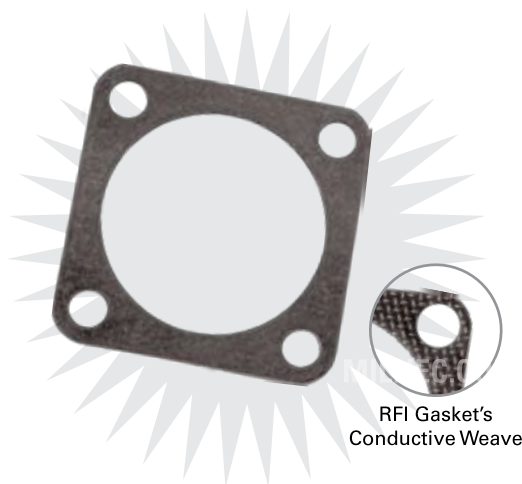

RFI Gasket's  
Conductive Weave

## PSGE - 16

- 1 **BASIC PART NUMBER**
- 2 **SHELL SIZE**

**PSGE** Standard gasket  
**PSGS** RFI shielding gasket  
**PSGL\*** Low-temperature gasket rated to -67°F (-55°C)

See Gasket Dimensions table below

\* Please consult an authorized distributor for lead time and minimum quantity requirements.

**Note:** See part builder (p. C-13) for additional kit options.


### Environmentally seal your mounting point

Mounting gaskets will seal the mounting space between the receptacles and the panel to maintain the environmental integrity of your enclosure. They may be used in either rear or front mount receptacle installations.

### Gasket Dimensions

Shell Size	W	S	Z	H	F
10	1.000 (25.4)	.719 (18.3)	.172 (4.4)	.625 (15.9)	.031 (.8)
12	1.094 (27.8)	.813 (20.7)	.172 (4.4)	.750 (19.1)	.031 (.8)
14	1.188 (30.2)	.906 (23.0)	.172 (4.4)	.875 (22.2)	.031 (.8)
16	1.281 (32.5)	.969 (24.6)	.172 (4.4)	1.000 (25.4)	.031 (.8)
18	1.375 (34.9)	1.063 (27.0)	.203 (5.2)	1.125 (28.6)	.031 (.8)
20	1.500 (38.1)	1.156 (29.4)	.203 (5.2)	1.250 (31.8)	.031 (.8)
22	1.625 (41.3)	1.250 (31.8)	.203 (5.2)	1.375 (34.9)	.031 (.8)
24	1.750 (44.5)	1.375 (34.9)	.203 (5.2)	1.500 (38.1)	.031 (.8)
28	2.000 (50.8)	1.563 (39.7)	.203 (5.2)	1.750 (44.5)	.031 (.8)
32	2.250 (57.2)	1.750 (44.5)	.219 (5.6)	2.000 (50.8)	.031 (.8)
36	2.500 (63.5)	1.938 (49.2)	.219 (5.6)	2.188 (55.6)	.031 (.8)

Dimensions are in inches (mm).

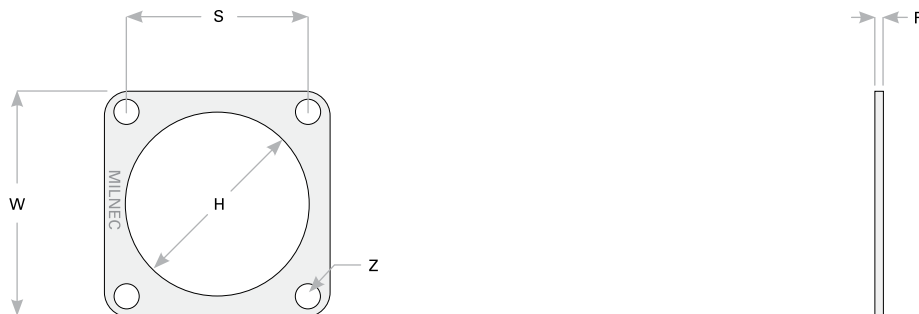

Rev. 1112.1