


M28876 Mounting Gasket

NF Series • MIL-DTL-28876 Type Connectors

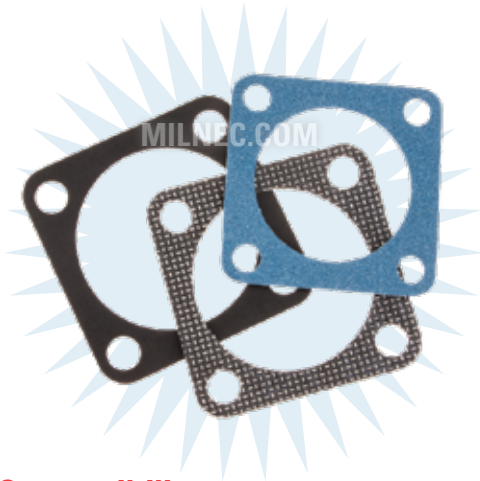

NFGE Compatibility

Compatible Brands	Connectors
MIL-DTL-28876	MS28876/1, MS28876/2, MS28876/3, MS28876/4
Amphenol	FS3M4, FS3M6, FS3M7


NFGE - 15

- 1 **BASIC PART NUMBER**
 - NFGE** Neoprene environmental (weather resistant)
Temp. range -40°F to +230°F (-40°C to +110°C)
 - NFGS** Conductive EMI-RFI neoprene, Ni-Cu mesh
Temp. range -40°F to +230°F (-40°C to +110°C)
 - NFGL** Fluorosilicone (jet fuel & oil resistant)
Temp. range -70°F to +392°F (-56°C to +200°C)
Per MIL-DTL-25988, Class 1, Grade 6
 - NFGD** Conductive EMI-RFI fluorosilicone, Al-Ag filled
Temp. range -70°F to +392°F (-56°C to +200°C)
Shielding effectiveness at 90 dB @ 10 GHz
Per MIL-DTL-83528, Type D
- 2 **SHELL SIZE**
See Dimensions table below

Dimensions

Shell Size	Military Shell Size	W Max	S Max	Z Max	H Max
11	A	1.039 (26.4)	.760 (19.3)	.130 (3.3)	.766 (19.5)
13	B	1.154 (29.3)	.853 (21.7)	.130 (3.3)	.891 (22.6)
15	C	1.274 (32.4)	.978 (24.8)	.130 (3.3)	1.078 (27.4)
23	F	1.734 (44.4)	1.291 (32.8)	.130 (3.3)	1.516 (38.5)

Dimensions are in inches (mm).

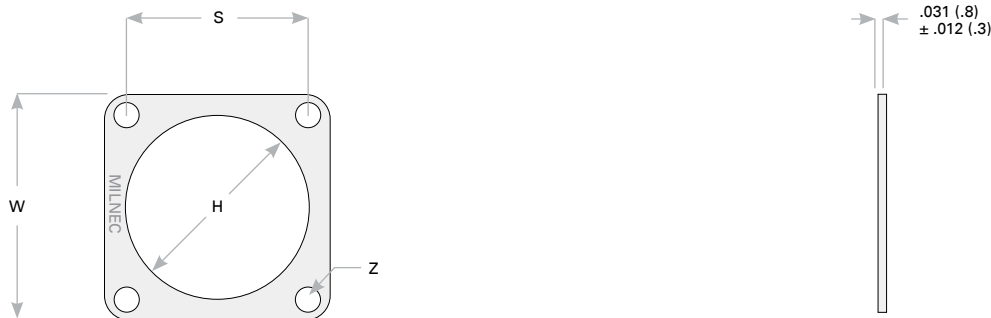

Rev. 1825