

## EVR2 - 009 N


- 1 **BASIC PART NUMBER**  
EVR2 Straight EMI/RFI env. backshell
- 2 **DASH NO.**  
See Backshell Dimensions table below
- 3 **MATERIAL & FINISH**  
N Aluminum, electroless nickel  
W Aluminum, olive drab cadmium



**Note:** See overview (pp.T-4-T-5) for all connector and accessory options.

### EVR2 Compatibility

Compatible Brands	Connectors
<b>MIL-DTL-83723 Series III</b>	M83723/71, /72, /73, /74, /75, /76, /77, /78, /82, /83, /84, /85, /86, /87, /91, /92, /95, /96
<b>Aero / Conesys</b>	AE83371, 72, 73, 74, 75, 76, 77, 78, 82, 83, 84, 85, 86, 87, 91, 92, 95, 96, 97, 98
<b>Amphenol / Matrix</b>	MB30, MB34, MB36, MB38, MT30, MT34, MT36, MT37, MT38
<b>Deutsch / TE</b>	DL60, DL64, DL66, DBA30, DBA34, DBA36

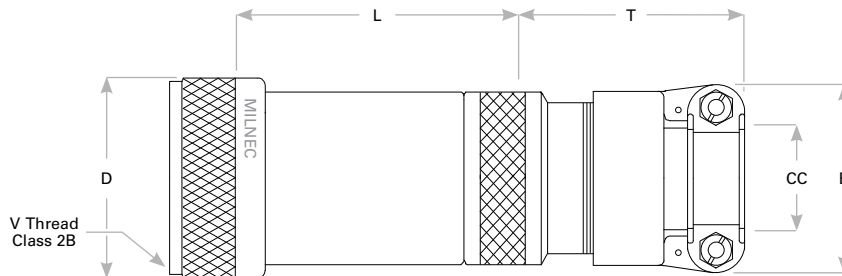

### Backshell Dimensions

Dash No.	Shell Size	V Thread Class 2B	T	D	B	L	CC Cable Clearance	
							Min	Max
005	8	.5000-20 UNF	1.544 (39.2)	.617 (15.7)	.957 (24.3)	2.125 (54.0)	.125 (3.2)	.250 (6.4)
006	8	.5000-20 UNF	1.544 (39.2)	.617 (15.7)	.957 (24.3)	3.125 (79.4)	.125 (3.2)	.250 (6.4)
007	8	.5000-20 UNF	1.544 (39.2)	.617 (15.7)	1.145 (29.1)	2.875 (73.0)	.250 (6.4)	.437 (11.1)
008	8	.5000-20 UNF	1.544 (39.2)	.617 (15.7)	1.145 (29.1)	3.875 (98.4)	.250 (6.4)	.437 (11.1)
009	10	.6250-24 UNEF	1.544 (39.2)	.730 (18.5)	.957 (24.3)	2.125 (54.0)	.125 (3.2)	.312 (7.9)
010	10	.6250-24 UNEF	1.544 (39.2)	.730 (18.5)	.957 (24.3)	3.125 (79.4)	.125 (3.2)	.312 (7.9)
136	10	.6250-24 UNEF	1.544 (39.2)	.730 (18.5)	1.145 (29.1)	2.125 (54.0)	.250 (6.4)	.375 (9.5)
137	10	.6250-24 UNEF	1.544 (39.2)	.730 (18.5)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.375 (9.5)
011	10	.6250-24 UNEF	1.544 (39.2)	.730 (18.5)	1.145 (29.1)	2.875 (73.0)	.250 (6.4)	.437 (11.1)
012	10	.6250-24 UNEF	1.544 (39.2)	.730 (18.5)	1.145 (29.1)	3.875 (98.4)	.250 (6.4)	.437 (11.1)
114	12	.7500-20 UNEF	1.544 (39.2)	.860 (21.8)	.957 (24.3)	2.125 (54.0)	.125 (3.2)	.312 (7.9)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1427

# Straight EMI/RFI Env. Backshell

EV Series • MIL-DTL-83723 Series III Type Connectors

## Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	T	D	B	L	CC Cable Clearance	
							Min	Max
115	12	.7500-20 UNEF	1.544 (39.2)	.860 (21.8)	.957 (24.3)	3.125 (54.0)	.125 (3.2)	.312 (7.9)
013	12	.7500-20 UNEF	1.544 (39.2)	.860 (21.8)	1.145 (29.1)	2.125 (54.0)	.250 (6.4)	.437 (11.1)
014	12	.7500-20 UNEF	1.544 (39.2)	.860 (21.8)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.437 (11.1)
138	12	.7500-20 UNEF	1.844 (46.8)	.860 (21.8)	1.332 (33.8)	2.125 (54.0)	.350 (8.9)	.500 (12.7)
139	12	.7500-20 UNEF	1.844 (46.8)	.860 (21.8)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.500 (12.7)
111	12	.7500-20 UNEF	1.844 (46.8)	.860 (21.8)	1.332 (33.8)	2.125 (54.0)	.350 (8.9)	.500 (12.7)
015	12	.7500-20 UNEF	1.844 (46.8)	.860 (21.8)	1.332 (33.8)	2.875 (73.0)	.350 (8.9)	.625 (15.9)
016	12	.7500-20 UNEF	1.844 (46.8)	.860 (21.8)	1.332 (33.8)	3.875 (98.4)	.350 (8.9)	.625 (15.9)
150	14	.8750-20 UNEF	1.544 (39.2)	.980 (24.9)	.957 (24.3)	2.125 (54.0)	.125 (3.2)	.312 (7.9)
151	14	.8750-20 UNEF	1.544 (39.2)	.980 (24.9)	.957 (24.3)	3.125 (79.4)	.125 (3.2)	.312 (7.9)
116	14	.8750-20 UNEF	1.544 (39.2)	.980 (24.9)	1.145 (29.1)	2.125 (54.0)	.250 (6.4)	.437 (11.1)
117	14	.8750-20 UNEF	1.544 (39.2)	.980 (24.9)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.437 (11.1)
017	14	.8750-20 UNEF	1.844 (46.8)	.980 (24.9)	1.332 (33.8)	2.125 (54.0)	.350 (8.9)	.575 (14.6)
018	14	.8750-20 UNEF	1.844 (46.8)	.980 (24.9)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.575 (14.6)
019	14	.8750-20 UNEF	1.916 (48.7)	.980 (24.9)	1.551 (39.4)	2.875 (73.0)	.500 (12.7)	.750 (19.1)
020	14	.8750-20 UNEF	1.916 (48.7)	.980 (24.9)	1.551 (39.4)	3.875 (98.4)	.500 (12.7)	.750 (19.1)
152	16	1.0000-20 UNEF	1.544 (39.2)	1.110 (28.2)	.957 (24.3)	2.125 (54.0)	.125 (3.2)	.312 (7.9)
153	16	1.0000-20 UNEF	1.544 (39.2)	1.110 (28.2)	.957 (24.3)	3.125 (79.4)	.125 (3.2)	.312 (7.9)
112	16	1.0000-20 UNEF	1.544 (39.2)	1.110 (28.2)	1.145 (29.1)	2.125 (54.0)	.250 (6.4)	.437 (11.1)
113	16	1.0000-20 UNEF	1.544 (39.2)	1.110 (28.2)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.437 (11.1)
118	16	1.0000-20 UNEF	1.844 (46.8)	1.110 (28.2)	1.332 (33.8)	2.125 (54.0)	.350 (8.9)	.625 (15.9)
119	16	1.0000-20 UNEF	1.844 (46.8)	1.110 (28.2)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.625 (15.9)
021	16	1.0000-20 UNEF	1.916 (48.7)	1.110 (28.2)	1.551 (39.4)	2.125 (54.0)	.500 (12.7)	.700 (17.8)
022	16	1.0000-20 UNEF	1.916 (48.7)	1.110 (28.2)	1.551 (39.4)	3.125 (79.4)	.500 (12.7)	.700 (17.8)
023	16	1.0000-20 UNEF	2.000 (50.8)	1.110 (28.2)	1.770 (45.0)	2.875 (73.0)	.625 (15.9)	.937 (23.8)
024	16	1.0000-20 UNEF	2.000 (50.8)	1.110 (28.2)	1.770 (45.0)	3.875 (98.4)	.625 (15.9)	.937 (23.8)
120	18	1.0625-18 UNEF	1.544 (39.2)	1.220 (31.0)	.957 (24.3)	2.125 (54.0)	.125 (3.2)	.312 (7.9)
121	18	1.0625-18 UNEF	1.544 (39.2)	1.220 (31.0)	.957 (24.3)	3.125 (79.4)	.125 (3.2)	.312 (7.9)
122	18	1.0625-18 UNEF	1.544 (39.2)	1.220 (31.0)	1.145 (29.1)	2.125 (54.0)	.250 (6.4)	.437 (11.1)
123	18	1.0625-18 UNEF	1.544 (39.2)	1.220 (31.0)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.437 (11.1)
025	18	1.0625-18 UNEF	1.844 (46.8)	1.220 (31.0)	1.332 (33.8)	2.125 (54.0)	.350 (8.9)	.625 (15.9)
026	18	1.0625-18 UNEF	1.844 (46.8)	1.220 (31.0)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.625 (15.9)
027	18	1.0625-18 UNEF	1.916 (48.7)	1.220 (31.0)	1.551 (39.4)	2.125 (54.0)	.500 (12.7)	.750 (19.1)
028	18	1.0625-18 UNEF	1.916 (48.7)	1.220 (31.0)	1.551 (39.4)	3.125 (79.4)	.500 (12.7)	.750 (19.1)
029	18	1.0625-18 UNEF	2.000 (50.8)	1.220 (31.0)	1.770 (45.0)	2.875 (73.0)	.625 (15.9)	.937 (23.8)
030	18	1.0625-18 UNEF	2.000 (50.8)	1.220 (31.0)	1.770 (45.0)	3.875 (98.4)	.625 (15.9)	.937 (23.8)
124	20	1.1875-18 UNEF	1.544 (39.2)	1.340 (34.0)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.437 (11.1)
125	20	1.1875-18 UNEF	1.544 (39.2)	1.340 (34.0)	1.145 (29.1)	4.125 (104.8)	.250 (6.4)	.437 (11.1)
031	20	1.1875-18 UNEF	1.844 (46.8)	1.340 (34.0)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.625 (15.9)
032	20	1.1875-18 UNEF	1.844 (46.8)	1.340 (34.0)	1.332 (33.8)	4.125 (104.8)	.350 (8.9)	.625 (15.9)
033	20	1.1875-18 UNEF	1.916 (48.7)	1.340 (34.0)	1.551 (39.4)	3.125 (79.4)	.500 (12.7)	.750 (19.1)
034	20	1.1875-18 UNEF	1.916 (48.7)	1.340 (34.0)	1.551 (39.4)	4.125 (104.8)	.500 (12.7)	.750 (19.1)
140	20	1.1875-18 UNEF	2.000 (50.8)	1.340 (34.0)	1.770 (45.0)	3.125 (79.4)	.625 (15.9)	.904 (23.0)
141	20	1.1875-18 UNEF	2.000 (50.8)	1.340 (34.0)	1.770 (45.0)	4.125 (104.8)	.625 (15.9)	.904 (23.0)
035	20	1.1875-18 UNEF	2.000 (50.8)	1.340 (34.0)	1.770 (45.0)	3.875 (98.4)	.625 (15.9)	.937 (23.8)
036	20	1.1875-18 UNEF	2.000 (50.8)	1.340 (34.0)	1.770 (45.0)	4.875 (123.8)	.625 (15.9)	.937 (23.8)
037	20	1.1875-18 UNEF	2.230 (56.6)	1.340 (34.0)	2.113 (53.7)	3.875 (98.4)	.875 (22.2)	1.250 (31.8)
038	20	1.1875-18 UNEF	2.230 (56.6)	1.340 (34.0)	2.113 (53.7)	4.875 (123.8)	.875 (22.2)	1.250 (31.8)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1427

## Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	T	D	B	L	CC Cable Clearance	
							Min	Max
126	22	1.3125-18 UNEF	1.544 (39.2)	1.470 (37.3)	.957 (24.3)	3.125 (79.4)	.125 (3.2)	.312 (7.9)
127	22	1.3125-18 UNEF	1.544 (39.2)	1.470 (37.3)	.957 (24.3)	4.125 (104.8)	.125 (3.2)	.312 (7.9)
128	22	1.3125-18 UNEF	1.544 (39.2)	1.470 (37.3)	1.145 (29.1)	3.125 (79.4)	.250 (6.4)	.437 (11.1)
129	22	1.3125-18 UNEF	1.544 (39.2)	1.470 (37.3)	1.145 (29.1)	4.125 (104.8)	.250 (6.4)	.437 (11.1)
039	22	1.3125-18 UNEF	1.844 (46.8)	1.470 (37.3)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.625 (15.9)
040	22	1.3125-18 UNEF	1.844 (46.8)	1.470 (37.3)	1.332 (33.8)	4.125 (104.8)	.350 (8.9)	.625 (15.9)
041	22	1.3125-18 UNEF	1.916 (48.7)	1.470 (37.3)	1.551 (39.4)	3.125 (79.4)	.500 (12.7)	.750 (19.1)
042	22	1.3125-18 UNEF	1.916 (48.7)	1.470 (37.3)	1.551 (39.4)	4.125 (104.8)	.500 (12.7)	.750 (19.1)
043	22	1.3125-18 UNEF	2.000 (50.8)	1.470 (37.3)	1.770 (45.0)	3.125 (79.4)	.625 (15.9)	.937 (23.8)
044	22	1.3125-18 UNEF	2.000 (50.8)	1.470 (37.3)	1.770 (45.0)	4.125 (104.8)	.625 (15.9)	.937 (23.8)
142	22	1.3125-18 UNEF	2.230 (56.6)	1.470 (37.3)	2.113 (53.7)	3.125 (79.4)	.875 (22.2)	1.029 (26.1)
143	22	1.3125-18 UNEF	2.230 (56.6)	1.470 (37.3)	2.113 (53.7)	4.125 (104.8)	.875 (22.2)	1.029 (26.1)
045	22	1.3125-18 UNEF	2.230 (56.6)	1.470 (37.3)	2.113 (53.7)	3.875 (98.4)	.875 (22.2)	1.250 (31.8)
046	22	1.3125-18 UNEF	2.230 (56.6)	1.470 (37.3)	2.113 (53.7)	4.875 (123.8)	.875 (22.2)	1.250 (31.8)
130	24	1.4375-18 UNEF	1.844 (46.8)	1.590 (40.4)	1.332 (33.8)	3.125 (79.4)	.350 (8.9)	.625 (15.9)
131	24	1.4375-18 UNEF	1.844 (46.8)	1.590 (40.4)	1.332 (33.8)	4.125 (104.8)	.350 (8.9)	.625 (15.9)
047	24	1.4375-18 UNEF	1.916 (48.7)	1.590 (40.4)	1.551 (39.4)	3.125 (79.4)	.500 (12.7)	.750 (19.1)
048	24	1.4375-18 UNEF	1.916 (48.7)	1.590 (40.4)	1.551 (39.4)	4.125 (104.8)	.500 (12.7)	.750 (19.1)
049	24	1.4375-18 UNEF	2.000 (50.8)	1.590 (40.4)	1.770 (45.0)	3.125 (79.4)	.625 (15.9)	.812 (20.6)
050	24	1.4375-18 UNEF	2.000 (50.8)	1.590 (40.4)	1.770 (45.0)	4.125 (104.8)	.625 (15.9)	.812 (20.6)
051	24	1.4375-18 UNEF	2.000 (50.8)	1.590 (40.4)	1.770 (45.0)	3.125 (79.4)	.625 (15.9)	.812 (20.6)
052	24	1.4375-18 UNEF	2.000 (50.8)	1.590 (40.4)	1.770 (45.0)	4.125 (104.8)	.625 (15.9)	.812 (20.6)
144	24	1.4375-18 UNEF	2.230 (56.6)	1.590 (40.4)	2.113 (53.7)	3.125 (79.4)	.875 (22.2)	1.144 (29.1)
145	24	1.4375-18 UNEF	2.230 (56.6)	1.590 (40.4)	2.113 (53.7)	4.125 (104.8)	.875 (22.2)	1.144 (29.1)
053	24	1.4375-18 UNEF	2.230 (56.6)	1.590 (40.4)	2.113 (53.7)	3.875 (98.4)	.875 (22.2)	1.250 (31.8)
054	24	1.4375-18 UNEF	2.230 (56.6)	1.590 (40.4)	2.113 (53.7)	4.875 (123.8)	.875 (22.2)	1.250 (31.8)

Dimensions are in inches (mm).

