

M85049/141 Type 90° Low Profile Heat Shrink Boot

Ry85049 Series • M85049 Type Backshells



Ry85049/141 Compatibility

Compatible Connector Series

Supersedes MS3117


Ry85049/141 - 19 H C D P

- 1 **BASIC PART NUMBER**
Ry85049/141
 M85049/141 type
 90° low profile miniature heat shrink boot
 (Supersedes MS3117)
- 2 **DASH NO.**
 See dimensions table below
- 3 **MATERIAL**
A Flexible polyolefin
B General purpose polyolefin
G Zero halogen polyolefin
H High performance elastomer
- 4 **ADHESIVE**
C Zero halogen, hot melt
U No adhesive
- 5 **DRAIN HOLES (OMIT FOR NONE)**
D Drain holes
- 6 **INJECTION VENT PORTS (OMIT FOR NONE)**
P Vent ports


Ry85049/141 Dimensions

Dash No.	H ¹	H ²	J ¹ (Materials A, B, H)	J ¹ (Material G)	J ²	P	R	T	HW	JW Max	S	U
19	0.760 (19.3)	0.510 (13.0)	0.250 (6.4)	0.180 (4.6)	0.080 (2.0)	1.750 (44.5)	0.640 (16.3)	0.040 (1.0)	0.060 (1.5)	0.050 (1.1)	0.470 (11.9)	0.220 (5.6)
20	1.030 (26.2)	0.750 (19.1)	0.300 (7.6)	0.220 (5.6)	0.100 (2.5)	2.650 (67.3)	0.710 (18.0)	0.040 (1.0)	0.070 (1.8)	0.050 (1.1)	0.470 (11.9)	0.330 (8.4)
21	1.350 (34.3)	1.020 (25.9)	0.380 (9.7)	0.260 (6.6)	0.120 (3.0)	3.200 (81.3)	0.740 (18.8)	0.040 (1.0)	0.070 (1.8)	0.050 (1.1)	0.470 (11.9)	0.450 (11.4)
22	1.720 (43.7)	1.340 (34.0)	0.450 (11.4)	0.310 (7.9)	0.140 (3.6)	4.550 (115.6)	0.840 (21.3)	0.070 (1.8)	0.070 (1.8)	0.050 (1.1)	0.470 (11.9)	0.610 (15.5)

Dimensions are in inches (mm).

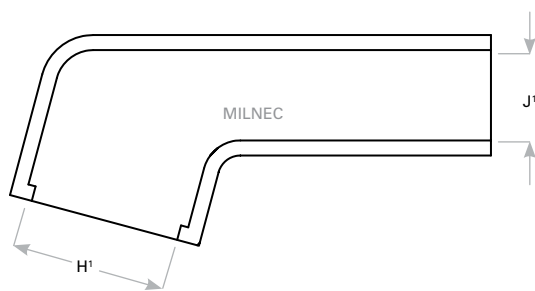

Before Heat Activation

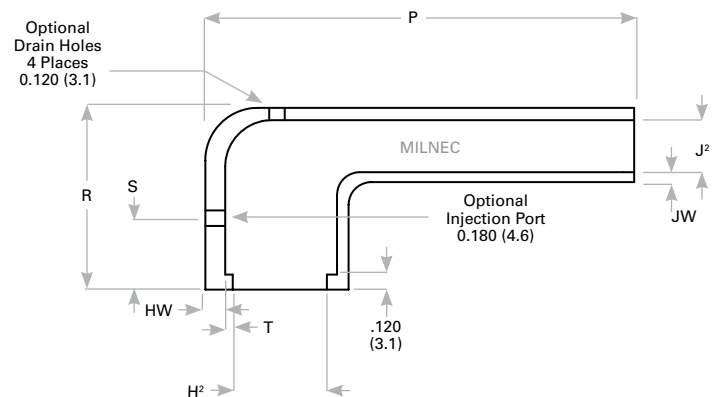

After Heat Activation

Rev. 1825