



Mounting Gasket

HM Series • MIL-DTL-26482 Series 1 Type Connectors

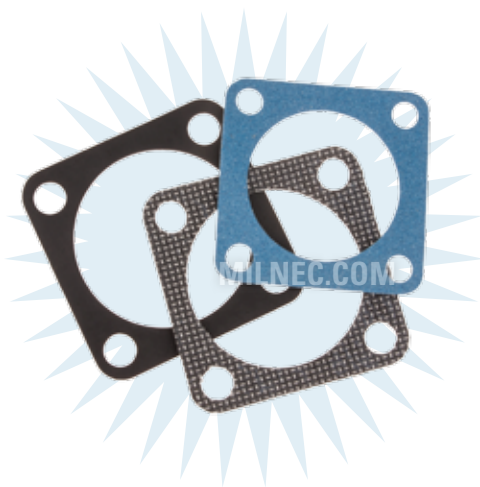

HMGE - 14

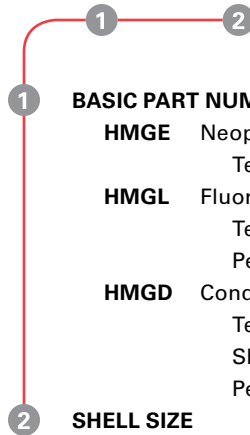

1 BASIC PART NUMBER

- HMGE** Neoprene environmental (weather resistant)
Temp. range -40°F to +230°F (-40°C to +110°C)
- HMGL** Fluorosilicone (jet fuel & oil resistant)
Temp. range -70°F to +392°F (-56°C to +200°C)
Per MIL-DTL-25988, Class 1, Grade 6
- HMGD** Conductive EMI-RFI fluorosilicone, Al-Ag filled
Temp. range -70°F to +392°F (-56°C to +200°C)
Shielding effectiveness at 90 dB @ 10 GHz
Per MIL-DTL-83528, Type D

2 SHELL SIZE

See Gasket Dimensions table below

HMGE Compatibility



Compatible Brands	Receptacles
MIL-DTL-26482 Series 1	MS3110, MS3112
Amphenol	PT00, PT02
Array	PW00, PW02
ITT Cannon	KPT00, KPT02
Souriau	85100, 85102

Note: See part builder (p. H-8) for additional kit options.

Gasket Dimensions

Shell Size	W	S	Z	H
8	.812 (20.6)	.594 (15.1)	.130 (3.3)	.500 (12.7)
10	.938 (23.8)	.719 (18.3)	.130 (3.3)	.625 (15.9)
12	1.031 (26.2)	.813 (20.7)	.130 (3.3)	.750 (19.1)
14	1.125 (28.6)	.906 (23.0)	.130 (3.3)	.875 (22.2)
16	1.219 (31.0)	.969 (24.6)	.130 (3.3)	1.000 (25.4)
18	1.312 (33.3)	1.063 (27.0)	.130 (3.3)	1.125 (28.6)
20	1.438 (36.5)	1.156 (29.4)	.130 (3.3)	1.250 (31.8)
22	1.563 (39.7)	1.250 (31.8)	.130 (3.3)	1.375 (34.9)
24	1.688 (42.9)	1.375 (34.9)	.130 (3.3)	1.500 (38.1)

Dimensions are in inches (mm).

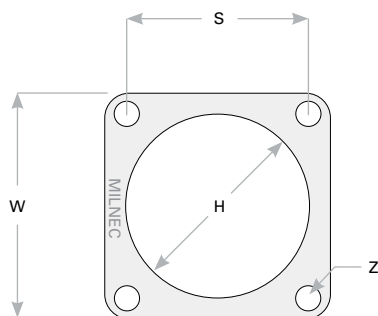

Rev. 1825