

# Boot Adapter

BM Series • MIL-DTL-26482 Series 2 Type Connectors



## BMAB - 16 N - K2

- 1 **BASIC PART NUMBER**  
**BMAB** Boot adapter
- 2 **SHELL SIZE**  
 See Adapter Dimensions table below
- 3 **MATERIAL & FINISH**  
**N** Aluminum, electroless nickel  
**W** Aluminum, olive drab cadmium
- 4 **OPTIONAL BOOT KIT (OMIT FOR NONE)**  
**K2** Includes recommended straight shrink boot in standard material 100, p. J-43  
**K4** Includes recommended 90° shrink boot in standard material 100, p. J-44

### BMAB Compatibility



Compatible Brands	Connectors
<b>MIL-DTL-26482 Series 2</b>	MS3470, MS3471, MS3472, MS3474, MS3475, MS3476
<b>Aero / Conesys</b>	AE770, AE771, AE772, AE774, AE775, AE776
<b>Amphenol / Matrix</b>	MB10, MB11, MB13, MB14, MB16, MB18
<b>Deutsch</b>	AFD50, AFD51, AFD54, AFD56, AFD57, AFD58
<b>Souriau</b>	8526-0, 8526-5, 8526-6, 8526-7

**Note:** See part builder (p. J-11) for additional kit options.

### Adapter Dimensions

Shell Size	CC Cable Clearance	L	M	U	V Thread Class 2B
8	.250 (6.4)	.832 (21.1)	.617 (15.7)	.533 (13.5)	.500-20 UNF
10	.355 (9.0)	.832 (21.1)	.770 (19.6)	.605 (15.4)	.625-24 UNEF
12	.491 (12.5)	.832 (21.1)	.860 (21.8)	.774 (19.7)	.750-20 UNEF
14	.565 (14.4)	.832 (21.1)	1.020 (25.9)	.838 (21.3)	.875-20 UNEF
16	.690 (17.5)	.832 (21.1)	1.210 (30.7)	.963 (24.5)	1.000-20 UNEF
18	.769 (19.5)	.832 (21.1)	1.230 (31.2)	1.042 (26.5)	1.062-18 UNEF
20	.894 (22.7)	.832 (21.1)	1.360 (34.5)	1.217 (30.9)	1.188-18 UNEF
22	1.019 (25.9)	.832 (21.1)	1.480 (37.6)	1.355 (34.4)	1.313-18 UNEF
24	1.134 (28.8)	.832 (21.1)	1.730 (43.9)	1.443 (36.7)	1.438-18 UNEF

Dimensions are in inches (mm).

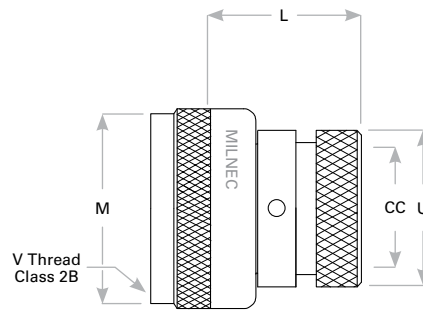

Rev. 1301.1