

# EMI/RFI Banding Boot Adapters

DL Series • MIL-DTL-38999 Series I Style Connectors

## DLD2 - 15 N - K2

- 1 **BASIC PART NUMBER**
  - DLD2** Straight EMI/RFI banding boot adapter
  - DLD3** 45° EMI/RFI banding boot adapter
  - DLD4** 90° EMI/RFI banding boot adapter  
(Includes shield termination band TB250, p. N-57)
- 2 **SHELL SIZE**

See Adapter Dimensions table below
- 3 **MATERIAL & FINISH**
  - N** Aluminum, electroless nickel
  - W** Aluminum, olive drab cadmium
- 4 **OPTIONAL BOOT KIT (OMIT FOR NONE)**
  - K2** Includes recommended straight shrink boot in standard material 100, p. N-48



Photo for example only

### DLD2 Compatibility


Compatible Brands	Connectors
<b>MIL-DTL-38999 Series I</b>	MS27466, MS27467, MS27468, MS27656
<b>Aero / Conesys</b>	AE156, AE167, AE166, AE168
<b>Amphenol</b>	LJT00, LTJQP00, LJT01, LJT06, LJTS06, LJT07
<b>Deutsch</b>	DJTO, DJT4, DJT6
<b>ITT Cannon</b>	KJA0, KJL0, KJL3, KJL6, KJL7
<b>Souriau</b>	8LT0, 8LT1, 8LT5, 8LT7

**Note:** Designed for use with straight shrink boot (DLK2, p. N-48). See part builder (p. N-14) for additional kit options.

### Adapter Dimensions

Shell Size	CC Cable Clearance	M	D	L	N	K	E	T	V Thread Class 2B
9	.250 (6.4)	.437 (11.1)	.858 (21.8)	1.350 (34.3)	1.012 (25.7)	1.161 (29.5)	1.375 (34.9)	1.417 (36.0)	.438-28 UNEF
11	.312 (7.9)	.500 (12.7)	.998 (25.4)	1.350 (34.3)	1.031 (26.2)	1.189 (30.2)	1.437 (36.5)	1.480 (37.6)	.562-24 UNEF
13	.438 (11.1)	.624 (15.8)	1.161 (29.5)	1.350 (34.3)	1.059 (26.9)	1.209 (30.7)	1.562 (39.7)	1.553 (39.4)	.688-24 UNEF
15	.562 (14.3)	.750 (19.1)	1.280 (32.5)	1.350 (34.3)	1.079 (27.4)	1.240 (31.5)	1.687 (42.8)	1.614 (41.0)	.813-20 UNEF
17	.625 (15.9)	.812 (20.6)	1.409 (35.8)	1.350 (34.3)	1.110 (28.2)	1.260 (32.0)	1.750 (44.5)	1.678 (42.6)	.938-20 UNEF
19	.750 (19.1)	.937 (23.8)	1.520 (38.6)	1.350 (34.3)	1.118 (28.4)	1.272 (32.3)	1.875 (47.6)	1.733 (44.0)	1.063-18 UNEF
21	.812 (20.6)	1.000 (25.4)	1.642 (41.7)	1.350 (34.3)	1.150 (29.2)	1.299 (33.0)	1.938 (49.2)	1.796 (45.6)	1.188-18 UNEF
23	.938 (23.8)	1.124 (28.5)	1.772 (45.0)	1.350 (34.3)	1.169 (29.7)	1.331 (33.8)	2.062 (52.4)	1.859 (47.2)	1.313-18 UNEF
25	1.000 (25.4)	1.187 (30.1)	1.890 (48.0)	1.350 (34.3)	1.201 (30.5)	1.350 (34.3)	2.125 (54.0)	1.919 (48.7)	1.438-18 UNEF

Dimensions are in inches (mm).

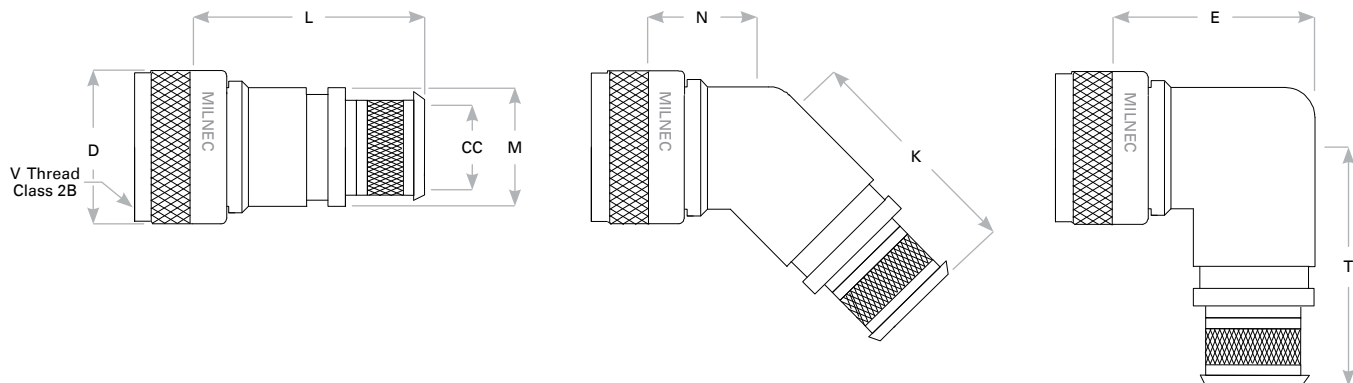

Rev. 2138