

Boot Adapter

DL Series • MIL-DTL-38999 Series I Style Connectors



DLAB - 15 B - K2

- 1 **BASIC PART NUMBER**
DLAB Boot adapter
- 2 **SHELL SIZE**
See Adapter Dimensions table below
- 3 **MATERIAL & FINISH**
 - B Aluminum, hardcoat anodize
 - N Aluminum, electroless nickel
 - W Aluminum, olive drab cadmium
- 4 **OPTIONAL BOOT KIT (OMIT FOR NONE)**
 - K2 Includes recommended straight shrink boot in standard material 100, p. N-48
 - K4 Includes recommended 90° shrink boot in standard material 100, p. N-49

DLAB Compatibility



Compatible Brands	Connectors
MIL-DTL-38999 Series I	MS27466, MS27467, MS27468, MS27656
Aero / Conesys	AE156, AE167, AE166, AE168
Amphenol	LJT00, LTJQ00, LJT01, LJT06, LJTS06, LJT07
Deutsch	DJT0, DJT4, DJT6
ITT Cannon	KJA0, KJL0, KJL3, KJL6, KJL7
Souriau	8LT0, 8LT1, 8LT5, 8LT7

Note: See part builder (p. N-14) for additional kit options.

Adapter Dimensions

Shell Size	CC Cable Clearance	L	D	U	V Thread Class 2B
9	.250 (6.4)	.710 (18.0)	.600 (15.2)	.533 (13.5)	.438-28 UNEF
11	.375 (9.5)	.710 (18.0)	.717 (18.2)	.605 (15.4)	.562-24 UNEF
13	.500 (12.7)	.710 (18.0)	.834 (21.2)	.774 (19.7)	.688-24 UNEF
15	.625 (15.9)	.710 (18.0)	.990 (25.2)	.838 (21.3)	.813-20 UNEF
17	.750 (19.1)	.710 (18.0)	1.107 (28.1)	.963 (24.5)	.938-20 UNEF
19	.812 (20.6)	.710 (18.0)	1.224 (31.1)	1.042 (26.5)	1.063-18 UNEF
21	.938 (23.8)	.710 (18.0)	1.341 (34.1)	1.217 (30.9)	1.188-18 UNEF
23	1.062 (27.0)	.710 (18.0)	1.453 (36.9)	1.355 (34.4)	1.313-18 UNEF
25	1.188 (30.2)	.710 (18.0)	1.567 (39.8)	1.443 (36.7)	1.438-18 UNEF

Dimensions are in inches (mm).

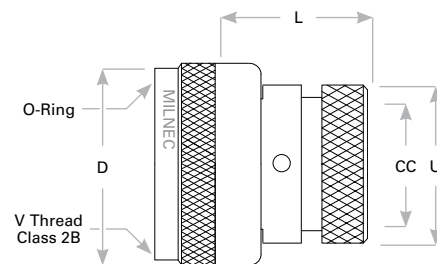

Rev. 1703