

# Straight EMI/RFI Env. Backshell

DS Series • MIL-DTL-38999 Series II Style Connectors



Photo for example only

## DSR2 - 035 N

- 1 **BASIC PART NUMBER**
- 2 **DASH NO.**
- 3 **MATERIAL & FINISH**

**DSR2** Straight EMI/RFI environmental backshell


See Backshell Dimensions table below

**N** Aluminum, electroless nickel  
**W** Aluminum, olive drab cadmium

**Note:** See part builder (p. R-14) for additional kit options.

## DSR2 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series II	MS27472, MS27473, MS27474, MS27484, MS27497
Aero / Conesys	AE272, AE273, AE274, AE284, AE297
Amphenol	JT00, JTPQ00, JT01, JT06, JTG06, JT07
ITT Cannon	KJ0, KJ3, KJ6, KJG6, KJ7
Souriau	8T1, 8L3, 8T6, 8T7

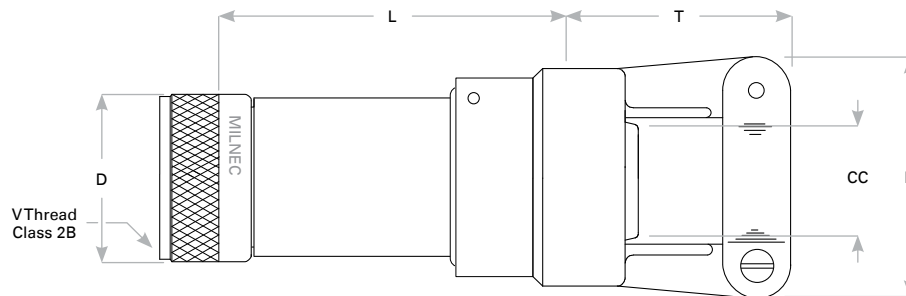

## Backshell Dimensions

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
001	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
002	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
003	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
004	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
005	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
006	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
007	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
008	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
009	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
010	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 2138

### Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
011	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
012	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
013	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
014	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
015	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
016	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
017	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
018	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
019	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	.969 (24.6)	3.500 (88.9)	.125 (3.2)	.250 (6.4)
020	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
021	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
022	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
023	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
024	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
025	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
026	14	.813-20 UNEF	.949 (24.1)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
027	14	.813-20 UNEF	.949 (24.1)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
028	14	.813-20 UNEF	.949 (24.1)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
029	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
030	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
031	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	.969 (24.6)	3.500 (88.9)	.125 (3.2)	.250 (6.4)
032	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
033	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
034	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
035	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
036	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
037	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
038	16	.938-20 UNEF	1.079 (27.4)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
039	16	.938-20 UNEF	1.079 (27.4)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
040	16	.938-20 UNEF	1.079 (27.4)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
041	16	.938-20 UNEF	1.079 (27.4)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
042	16	.938-20 UNEF	1.079 (27.4)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
043	16	.938-20 UNEF	1.079 (27.4)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
044	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
045	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
046	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
047	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
048	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
049	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
050	18	1.063-18 UNEF	1.201 (30.5)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
051	18	1.063-18 UNEF	1.201 (30.5)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
052	18	1.063-18 UNEF	1.201 (30.5)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
053	18	1.063-18 UNEF	1.201 (30.5)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
054	18	1.063-18 UNEF	1.201 (30.5)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
055	18	1.063-18 UNEF	1.201 (30.5)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
056	18	1.063-18 UNEF	1.201 (30.5)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
057	18	1.063-18 UNEF	1.201 (30.5)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
058	18	1.063-18 UNEF	1.201 (30.5)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 2138

# Straight EMI/RFI Env. Backshell

DS Series • MIL-DTL-38999 Series II Style Connectors

## Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
059	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
060	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
061	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
062	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	4.500 (114.3)	.250 (6.4)	.375 (9.5)
063	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
064	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
065	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
066	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
067	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
068	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
069	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
070	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
071	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
072	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
073	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
074	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
075	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
076	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
077	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
078	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
079	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
080	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
081	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)
082	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
083	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
084	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
085	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
086	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	4.500 (114.3)	.250 (6.4)	.375 (9.5)
087	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
088	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
089	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
090	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
091	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
092	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
093	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
094	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
095	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
096	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
097	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
098	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
099	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
100	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
101	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
102	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
103	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
104	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
105	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)

Dimensions are in inches (mm).

(Continued on next page)

## Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
106	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
107	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	1.500 (38.1)	1.000 (25.4)	1.125 (28.6)
108	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	2.500 (63.5)	1.000 (25.4)	1.125 (28.6)
109	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	3.500 (88.9)	1.000 (25.4)	1.125 (28.6)
110	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	4.500 (114.3)	1.000 (25.4)	1.125 (28.6)
111	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
112	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
113	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
114	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
115	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
116	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
117	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
118	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
119	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
120	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
121	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
122	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
123	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
124	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
125	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
126	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
127	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
128	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
129	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)
130	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
131	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	1.500 (38.1)	1.000 (25.4)	1.125 (28.6)
132	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	2.500 (63.5)	1.000 (25.4)	1.125 (28.6)
133	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	3.500 (88.9)	1.000 (25.4)	1.125 (28.6)
134	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	4.500 (114.3)	1.000 (25.4)	1.125 (28.6)
135	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	1.500 (38.1)	1.125 (28.6)	1.250 (31.8)
136	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	2.500 (63.5)	1.125 (28.6)	1.250 (31.8)
137	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	3.500 (88.9)	1.125 (28.6)	1.250 (31.8)
138	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	4.500 (114.3)	1.125 (28.6)	1.250 (31.8)

Dimensions are in inches (mm).

DS

