

Straight EMI/RFI Env. Backshell

DS Series • MIL-DTL-38999 Series II Style Connectors




DSR2 - 035 N

- 1 **BASIC PART NUMBER**
DSR2 Straight EMI/RFI environmental backshell
- 2 **DASH NO.**
See Backshell Dimensions table below
- 3 **MATERIAL & FINISH**
 - N Aluminum, electroless nickel
 - W Aluminum, olive drab cadmium

Note: See part builder (p. R-14) for additional kit options.

DSR2 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series II	MS27472, MS27473, MS27474, MS27484, MS27497
Aero / Conesys	AE272, AE273, AE274, AE284, AE297
Amphenol	JT00, JTPQ00, JT01, JT06, JTG06, JT07
ITT Cannon	KJ0, KJ3, KJ6, KJG6, KJ7
Souriau	8T1, 8L3, 8T6, 8T7

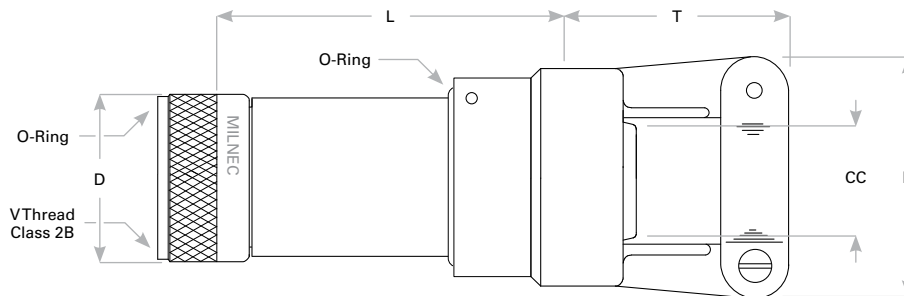

Backshell Dimensions

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
001	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
002	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
003	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
004	8	.438-28 UNEF	.571 (14.5)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
005	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
006	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
007	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
008	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
009	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
010	10	.562-24 UNEF	.701 (17.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1402.1

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
011	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
012	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
013	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
014	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
015	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
016	12	.688-24 UNEF	.831 (21.1)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
017	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
018	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
019	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	.969 (24.6)	3.500 (88.9)	.125 (3.2)	.250 (6.4)
020	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
021	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
022	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
023	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
024	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
025	14	.813-20 UNEF	.949 (24.1)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
026	14	.813-20 UNEF	.949 (24.1)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
027	14	.813-20 UNEF	.949 (24.1)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
028	14	.813-20 UNEF	.949 (24.1)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
029	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
030	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
031	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	.969 (24.6)	3.500 (88.9)	.125 (3.2)	.250 (6.4)
032	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
033	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
034	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
035	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
036	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
037	16	.938-20 UNEF	1.079 (27.4)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
038	16	.938-20 UNEF	1.079 (27.4)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
039	16	.938-20 UNEF	1.079 (27.4)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
040	16	.938-20 UNEF	1.079 (27.4)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
041	16	.938-20 UNEF	1.079 (27.4)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
042	16	.938-20 UNEF	1.079 (27.4)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
043	16	.938-20 UNEF	1.079 (27.4)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
044	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
045	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
046	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
047	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
048	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
049	18	1.063-18 UNEF	1.201 (30.5)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
050	18	1.063-18 UNEF	1.201 (30.5)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
051	18	1.063-18 UNEF	1.201 (30.5)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
052	18	1.063-18 UNEF	1.201 (30.5)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
053	18	1.063-18 UNEF	1.201 (30.5)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
054	18	1.063-18 UNEF	1.201 (30.5)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
055	18	1.063-18 UNEF	1.201 (30.5)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
056	18	1.063-18 UNEF	1.201 (30.5)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
057	18	1.063-18 UNEF	1.201 (30.5)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
058	18	1.063-18 UNEF	1.201 (30.5)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1402.1

Straight EMI/RFI Env. Backshell

DS Series • MIL-DTL-38999 Series II Style Connectors

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
059	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
060	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
061	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
062	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.062 (27.0)	4.500 (114.3)	.250 (6.4)	.375 (9.5)
063	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
064	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
065	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
066	20	1.188-18 UNEF	1.331 (33.8)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
067	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
068	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
069	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
070	20	1.188-18 UNEF	1.331 (33.8)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
071	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
072	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
073	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
074	20	1.188-18 UNEF	1.331 (33.8)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
075	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
076	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
077	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
078	20	1.188-18 UNEF	1.331 (33.8)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
079	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
080	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
081	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)
082	20	1.188-18 UNEF	1.331 (33.8)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
083	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
084	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
085	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
086	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.062 (27.0)	4.500 (114.3)	.250 (6.4)	.375 (9.5)
087	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
088	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
089	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
090	22	1.313-18 UNEF	1.449 (36.8)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
091	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
092	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
093	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
094	22	1.313-18 UNEF	1.449 (36.8)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
095	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
096	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
097	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
098	22	1.313-18 UNEF	1.449 (36.8)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
099	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
100	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
101	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
102	22	1.313-18 UNEF	1.449 (36.8)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
103	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
104	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
105	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1402.1

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
							Min	Max
106	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
107	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	1.500 (38.1)	1.000 (25.4)	1.125 (28.6)
108	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	2.500 (63.5)	1.000 (25.4)	1.125 (28.6)
109	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	3.500 (88.9)	1.000 (25.4)	1.125 (28.6)
110	22	1.313-18 UNEF	1.449 (36.8)	1.625 (41.3)	1.750 (44.5)	4.500 (114.3)	1.000 (25.4)	1.125 (28.6)
111	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
112	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
113	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
114	24	1.438-18 UNEF	1.579 (40.1)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
115	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
116	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
117	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
118	24	1.438-18 UNEF	1.579 (40.1)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
119	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
120	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
121	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
122	24	1.438-18 UNEF	1.579 (40.1)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
123	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
124	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
125	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
126	24	1.438-18 UNEF	1.579 (40.1)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
127	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
128	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
129	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)
130	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
131	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	1.500 (38.1)	1.000 (25.4)	1.125 (28.6)
132	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	2.500 (63.5)	1.000 (25.4)	1.125 (28.6)
133	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	3.500 (88.9)	1.000 (25.4)	1.125 (28.6)
134	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.750 (44.5)	4.500 (114.3)	1.000 (25.4)	1.125 (28.6)
135	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	1.500 (38.1)	1.125 (28.6)	1.250 (31.8)
136	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	2.500 (63.5)	1.125 (28.6)	1.250 (31.8)
137	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	3.500 (88.9)	1.125 (28.6)	1.250 (31.8)
138	24	1.438-18 UNEF	1.579 (40.1)	1.625 (41.3)	1.875 (47.6)	4.500 (114.3)	1.125 (28.6)	1.250 (31.8)

Dimensions are in inches (mm).

