

Boot Adapter

DS Series • MIL-DTL-38999 Series II Style Connectors



DSAB - 14 B - K2

- 1 **BASIC PART NUMBER**
DSAB Boot adapter
- 2 **SHELL SIZE**
See Adapter Dimensions table below
- 3 **MATERIAL & FINISH**
B Aluminum, hardcoat anodize
N Aluminum, electroless nickel
W Aluminum, olive drab cadmium
- 4 **OPTIONAL BOOT KIT (OMIT FOR NONE)**
K2 Includes recommended straight shrink boot in standard material 100, p. R-48
K4 Includes recommended 90° shrink boot in standard material 100, p. R-49

DSAB Compatibility



Compatible Brands	Connectors
MIL-DTL-38999 Series II	MS27472, MS27473, MS27474, MS27484, MS27497
Aero / Conesys	AE272, AE273, AE274, AE284, AE297
Amphenol	JT00, JTPQ00, JT01, JT06, JTG06, JT07
ITT Cannon	KJ0, KJ3, KJ6, KJG6, KJ7
Souriau	8T1, 8L3, 8T6, 8T7

Note: See part builder (p. R-14) for additional kit options.

Adapter Dimensions

Shell Size	CC Cable Clearance	L	D	U	V Thread Class 2B
8	.250 (6.4)	.710 (18.0)	.600 (15.2)	.533 (13.5)	.438-28 UNEF
10	.375 (9.5)	.710 (18.0)	.717 (18.2)	.605 (15.4)	.562-24 UNEF
12	.500 (12.7)	.710 (18.0)	.834 (21.2)	.774 (19.7)	.688-24 UNEF
14	.625 (15.9)	.710 (18.0)	.990 (25.2)	.838 (21.3)	.813-20 UNEF
16	.750 (19.1)	.710 (18.0)	1.107 (28.1)	.963 (24.5)	.938-20 UNEF
18	.812 (20.6)	.710 (18.0)	1.224 (31.1)	1.042 (26.5)	1.063-18 UNEF
20	.938 (23.8)	.710 (18.0)	1.341 (34.1)	1.217 (30.9)	1.188-18 UNEF
22	1.062 (27.0)	.710 (18.0)	1.453 (36.9)	1.355 (34.4)	1.313-18 UNEF
24	1.188 (30.2)	.710 (18.0)	1.567 (39.8)	1.443 (36.7)	1.438-18 UNEF

Dimensions are in inches (mm).

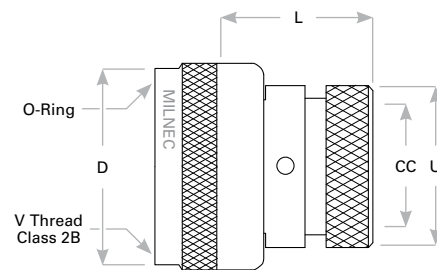

Rev. 1402.1