


90° EMI/RFI Env. Backshell

TX Series • MIL-DTL-38999 Series III Style Connectors

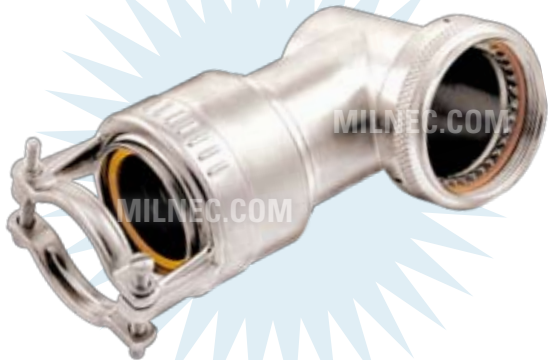


TXR4 - 015 K

- 1 **BASIC PART NUMBER**
TXR4 90° EMI/RFI environmental backshell
- 2 **DASH NO.**
See Backshell Dimensions table below
- 3 **MATERIAL & FINISH**
K Stainless steel, passivated (firewall)
L Stainless steel, electrodeposited nickel

Note: See part builder in TX Series catalog (p. B-17) for more kit options.

TXR4 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

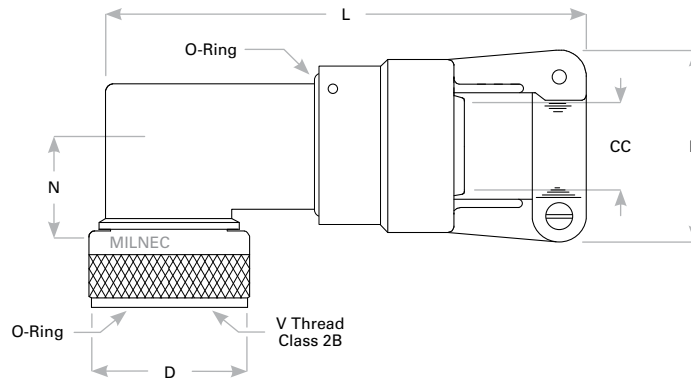

Backshell Dimensions

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	N	D	B	L	CC Cable Clearance	
								Min	Max
001	9	A	M12 X 1-6H	.438 (11.1)	.750 (19.1)	.800 (20.3)	3.141 (79.8)	.062 (1.6)	.125 (3.2)
002	9	A	M12 X 1-6H	.438 (11.1)	.750 (19.1)	1.000 (25.4)	3.141 (79.8)	.125 (3.2)	.250 (6.4)
003	11	B	M15 X 1-6H	.533 (13.5)	.850 (21.6)	.800 (20.3)	3.261 (82.8)	.062 (1.6)	.125 (3.2)
004	11	B	M15 X 1-6H	.533 (13.5)	.850 (21.6)	1.000 (25.4)	3.261 (82.8)	.125 (3.2)	.250 (6.4)
005	11	B	M15 X 1-6H	.533 (13.5)	.850 (21.6)	1.100 (27.9)	3.261 (82.8)	.250 (6.4)	.375 (9.5)
006	13	C	M18 X 1-6H	.548 (13.9)	1.000 (25.4)	1.000 (25.4)	3.281 (83.3)	.125 (3.2)	.250 (6.4)
007	13	C	M18 X 1-6H	.548 (13.9)	1.000 (25.4)	1.100 (27.9)	3.281 (83.3)	.250 (6.4)	.375 (9.5)
008	13	C	M18 X 1-6H	.548 (13.9)	1.000 (25.4)	1.200 (30.5)	3.281 (83.3)	.375 (9.5)	.500 (12.7)
009	15	D	M22 X 1-6H	.638 (16.2)	1.150 (29.2)	1.000 (25.4)	3.351 (85.1)	.125 (3.2)	.250 (6.4)
010	15	D	M22 X 1-6H	.638 (16.2)	1.150 (29.2)	1.100 (27.9)	3.351 (85.1)	.250 (6.4)	.375 (9.5)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1301.1