

Straight EMI/RFI Env. Backshell

TX Series • MIL-DTL-38999 Series III Style Connectors




TXR2 - 035 K

- 1 **BASIC PART NUMBER**
TXR2 Straight EMI/RFI environmental backshell
- 2 **DASH NO.**
See Backshell Dimensions table below
- 3 **MATERIAL & FINISH**
K Stainless steel, passivated (firewall)
L Stainless steel, electrodeposited nickel

Note: See part builder in TX Series catalog (p. B-17) for more kit options.

TXR2 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

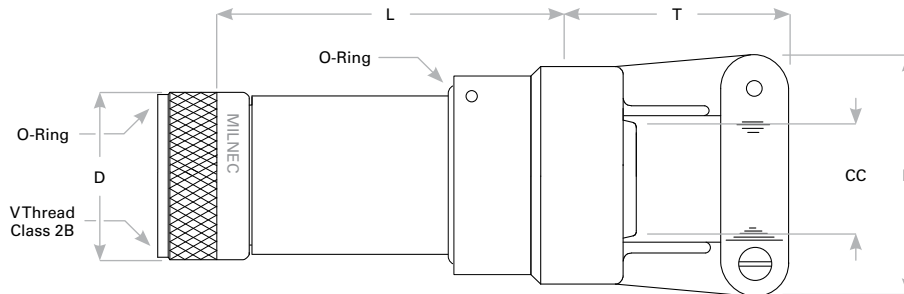

Backshell Dimensions

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
								Min	Max
001	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
002	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
003	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
004	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
005	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
006	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
007	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
008	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
009	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
010	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1301.1