

Boot Adapter

TX Series • MIL-DTL-38999 Series III Style Connectors



TXAB - 15 B - K2

- 1 **BASIC PART NUMBER**
TXAB Boot adapter
- 2 **SHELL SIZE**
See Adapter Dimensions table below
- 3 **MATERIAL & FINISH**
 - B Aluminum, hardcoat anodize
 - N Aluminum, electroless nickel
 - W Aluminum, olive drab cadmium
 - G Aluminum, electroless nickel (space-grade)
- 4 **OPTIONAL BOOT KIT (OMIT FOR NONE)**
 - K2 Includes recommended straight shrink boot in standard material 100, p. B-47
 - K4 Includes recommended 90° shrink boot in standard material 100, p. B-48

TXAB Compatibility



Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

Note: See part builder (p. B-17) for additional kit options.

Adapter Dimensions

Shell Size	Military Shell Size	CC Cable Clearance	L	D	U	V Thread Class 2B
9	A	.250 (6.4)	.710 (18.0)	.600 (15.2)	.533 (13.5)	M12 X 1-6H
11	B	.375 (9.5)	.710 (18.0)	.717 (18.2)	.605 (15.4)	M15 X 1-6H
13	C	.500 (12.7)	.710 (18.0)	.834 (21.2)	.774 (19.7)	M18 X 1-6H
15	D	.625 (15.9)	.710 (18.0)	.990 (25.2)	.838 (21.3)	M22 X 1-6H
17	E	.750 (19.1)	.710 (18.0)	1.107 (28.1)	.963 (24.5)	M25 X 1-6H
19	F	.812 (20.6)	.710 (18.0)	1.224 (31.1)	1.042 (26.5)	M28 X 1-6H
21	G	.938 (23.8)	.710 (18.0)	1.341 (34.1)	1.217 (30.9)	M31 X 1-6H
23	H	1.062 (27.0)	.710 (18.0)	1.453 (36.9)	1.355 (34.4)	M34 X 1-6H
25	J	1.188 (30.2)	.710 (18.0)	1.567 (39.8)	1.443 (36.7)	M37 X 1-6H

Dimensions are in inches (mm).

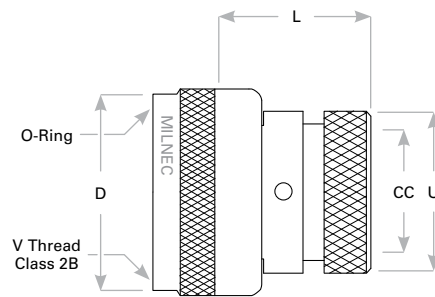

Rev. 1409