

TXC2 - 15 M

① ② ③

- ① **BASIC PART NUMBER**
TXC2 Straight EMI/RFI env. backshell (self-locking)
TXC4 90° EMI/RFI env. backshell (self-locking)
- ② **SHELL SIZE**
 See Backshell Dimensions table below
- ③ **MATERIAL & FINISH**
M Composite, electroless nickel
J Composite, olive drab cadmium

Note: See part builder (p. B-17) for additional kit options.





TXC2 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

Backshell Dimensions

Shell Size	Military Shell Size	V Thread Class 2B	D	B	R	N	T	E	U	L	CC Cable Clearance	
											Min	Max
9	A	M12 X 1-6H	.858 (21.8)	.940 (23.9)	.880 (22.4)	.690 (17.5)	1.060 (26.9)	.750 (19.1)	.800 (20.3)	2.500 (63.5)	.130 (3.3)	.250 (6.4)
11	B	M15 X 1-6H	.984 (25.0)	1.170 (29.7)	1.000 (25.4)	.750 (19.1)	1.130 (28.7)	.750 (19.1)	.930 (23.6)	2.500 (63.5)	.250 (6.4)	.380 (9.7)
13	C	M18 X 1-6H	1.157 (29.4)	1.280 (32.5)	1.130 (28.7)	.810 (20.6)	1.190 (30.2)	.750 (19.1)	1.060 (26.9)	2.500 (63.5)	.310 (7.9)	.440 (11.2)
15	D	M22 X 1-6H	1.279 (32.5)	1.410 (35.8)	1.310 (33.3)	.880 (22.4)	1.250 (31.8)	.750 (19.1)	1.220 (31.0)	2.500 (63.5)	.500 (12.7)	.630 (15.9)
17	E	M25 X 1-6H	1.406 (35.7)	1.500 (38.1)	1.380 (35.1)	.940 (23.9)	1.310 (33.3)	.750 (19.1)	1.240 (31.5)	2.500 (63.5)	.560 (14.2)	.690 (17.5)
19	F	M28 X 1-6H	1.516 (38.5)	1.560 (39.6)	1.440 (36.6)	.970 (24.6)	1.340 (34.0)	.750 (19.1)	1.370 (34.8)	2.500 (63.5)	.630 (16.0)	.750 (19.1)
21	G	M31 X 1-6H	1.642 (41.7)	1.690 (42.9)	1.630 (41.4)	1.060 (26.9)	1.440 (36.6)	.750 (19.1)	1.490 (37.8)	2.500 (63.5)	.750 (19.1)	.880 (22.2)
23	H	M34 X 1-6H	1.768 (44.9)	1.810 (46.0)	1.750 (44.5)	1.130 (28.7)	1.500 (38.1)	.750 (19.1)	1.620 (41.1)	2.500 (63.5)	.880 (22.4)	1.000 (25.4)
25	J	M37 X 1-6H	1.889 (48.0)	1.910 (48.5)	1.880 (47.8)	1.190 (30.2)	1.560 (39.6)	.750 (19.1)	1.680 (42.7)	2.500 (63.5)	1.000 (25.4)	1.130 (28.6)

Dimensions are in inches (mm).

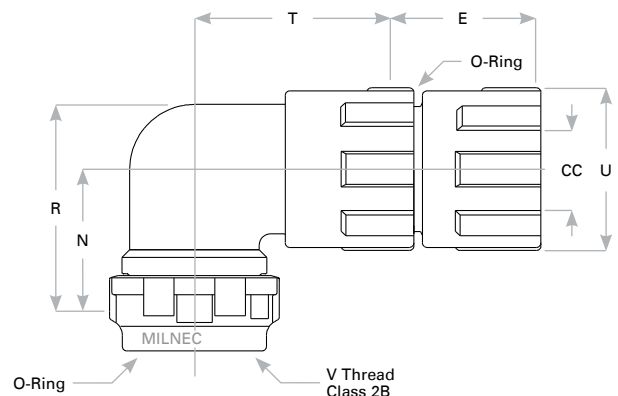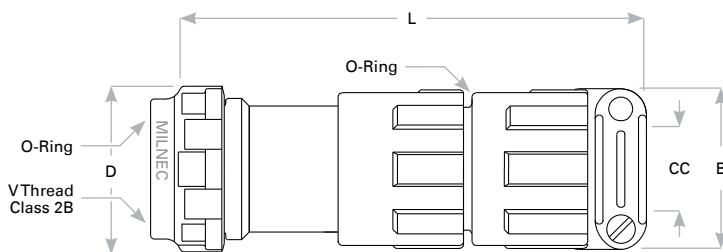

Rev. 2211