

## TXAG N 23-35 P N S A - 02

- 1 **BASIC PART NUMBER**  
TXAG Connector gender changer
- 2 **MATERIAL & FINISH**  
N Aluminum, electroless nickel  
W Aluminum, olive drab
- 3 **SHELL SIZE & INSERT ARRANGEMNT**  
See Insert Arrangement Selection table, p. B-19
- 4 **CONTACT STYLE (PLUG SIDE)**  
P Pins  
S Sockets
- 5 **ALTERNATE KEYING (PLUG SIDE)**  
N NORMAL or A, B, C, D, E
- 6 **CONTACT STYLE (RECEPTACLE SIDE)**  
P Pins  
S Sockets
- 7 **ALTERNATE KEYING (RECEPTACLE SIDE)**  
N NORMAL or A, B, C, D, E
- 8 **OPTIONAL ACCESSORY KIT (OMIT FOR NONE)**  
02 Protective covers (2x)



### TXAG Compatibility


Compatible Brands	Plug Side Mates	Receptacle Side Mates
MIL-DTL-38999 Series III	D38999/20, D38999/24	D38999/26
Aero / Conesys	AE320, AE324	AE326
Amphenol	TVP00, TVPS00, TVP07, TVPS07	TV06, TVS06, CTV06, CTVS06
Deutsch	DTS20, DTS24	DTS26
ITT Cannon	KJA0, KJA7	KJA6
Souriau	8D0, 8D1, 8D7	8D5, 8DS06G

Note: See part builder (p. B-17) for additional kit options.

### Connector Saver Dimensions

Shell Size	Military Shell Size	C Thread Class 2A/B	B
9	A	.6250-0.1P-0.3L-TS-2	.859 (21.8)
11	B	.7500-0.1P-0.3L-TS-2	.969 (24.6)
13	C	.8750-0.1P-0.3L-TS-2	1.141 (29.0)
15	D	1.0000-0.1P-0.3L-TS-2	1.266 (32.2)
17	E	1.1875-0.1P-0.3L-TS-2	1.391 (35.3)
19	F	1.2500-0.1P-0.3L-TS-2	1.500 (38.1)
21	G	1.3750-0.1P-0.3L-TS-2	1.625 (41.3)
23	H	1.5000-0.1P-0.3L-TS-2	1.750 (44.5)
25	J	1.6250-0.1P-0.3L-TS-2	1.875 (47.6)

Dimensions are in inches (mm).

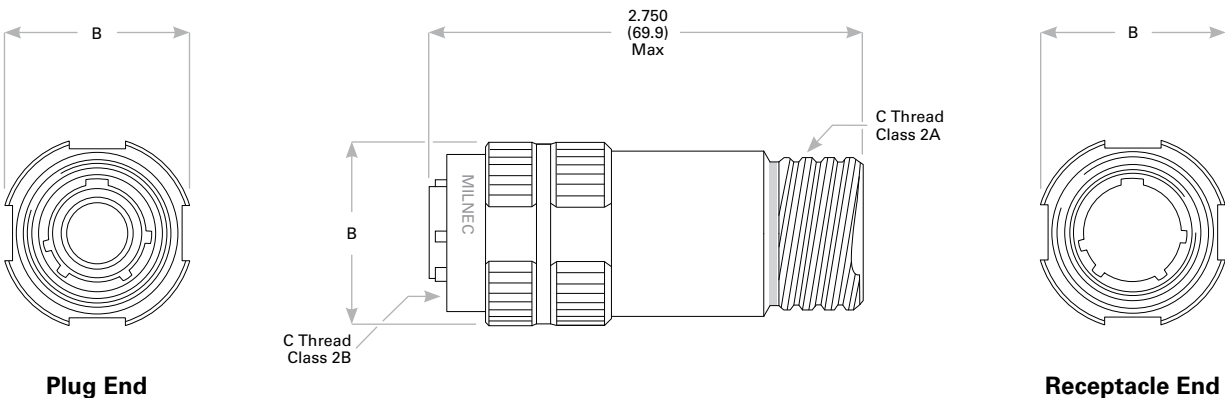

Rev. 1718