

Straight EMI/RFI Env. Backshell

TX Series • MIL-DTL-38999 Series III Style Connectors



TXR2 - 035 N

- 1 BASIC PART NUMBER
- 2 DASH NO.
- 3 MATERIAL & FINISH

1 BASIC PART NUMBER

TXR2 Straight EMI/RFI environmental backshell

2 DASH NO.

See Backshell Dimensions table below

3 MATERIAL & FINISH


- N** Aluminum, electroless nickel
- W** Aluminum, olive drab cadmium
- G** Aluminum, electroless nickel (space-grade)
- K*** Stainless steel, passivated
- L*** Stainless steel, electrodeposited nickel

* Please consult an authorized distributor for lead time and minimum quantity requirements.

TXR2 Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

Note: See part builder (p. B-17) for additional kit options.

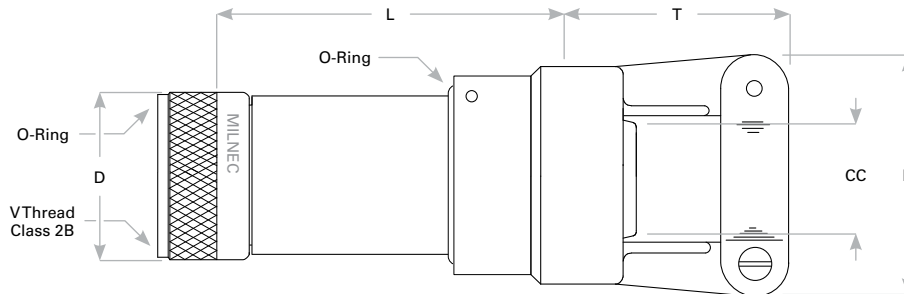

Backshell Dimensions

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
								Min	Max
001	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
002	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
003	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
004	9	A	M12 X 1-6H	.750 (19.1)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
005	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.781 (19.8)	1.500 (38.1)	.062 (1.6)	.125 (3.2)
006	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.781 (19.8)	2.500 (63.5)	.062 (1.6)	.125 (3.2)
007	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
008	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
009	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
010	11	B	M15 X 1-6H	.850 (21.6)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1819

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
								Min	Max
011	13	C	M18 X 1-6H	1.000 (25.4)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
012	13	C	M18 X 1-6H	1.000 (25.4)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
013	13	C	M18 X 1-6H	1.000 (25.4)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
014	13	C	M18 X 1-6H	1.000 (25.4)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
015	13	C	M18 X 1-6H	1.000 (25.4)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
016	13	C	M18 X 1-6H	1.000 (25.4)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
017	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
018	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
019	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	.969 (24.6)	3.500 (88.9)	.125 (3.2)	.250 (6.4)
020	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
021	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
022	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
023	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
024	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
025	15	D	M22 X 1-6H	1.150 (29.2)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
026	15	D	M22 X 1-6H	1.150 (29.2)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
027	15	D	M22 X 1-6H	1.150 (29.2)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
028	15	D	M22 X 1-6H	1.150 (29.2)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
029	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	.969 (24.6)	1.500 (38.1)	.125 (3.2)	.250 (6.4)
030	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	.969 (24.6)	2.500 (63.5)	.125 (3.2)	.250 (6.4)
031	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	.969 (24.6)	3.500 (88.9)	.125 (3.2)	.250 (6.4)
032	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
033	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
034	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
035	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
036	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
037	17	E	M25 X 1-6H	1.250 (31.8)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
038	17	E	M25 X 1-6H	1.250 (31.8)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
039	17	E	M25 X 1-6H	1.250 (31.8)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
040	17	E	M25 X 1-6H	1.250 (31.8)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
041	17	E	M25 X 1-6H	1.250 (31.8)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
042	17	E	M25 X 1-6H	1.250 (31.8)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
043	17	E	M25 X 1-6H	1.250 (31.8)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
044	19	F	M28 X 1-6H	1.400 (35.6)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
045	19	F	M28 X 1-6H	1.400 (35.6)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
046	19	F	M28 X 1-6H	1.400 (35.6)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
047	19	F	M28 X 1-6H	1.400 (35.6)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
048	19	F	M28 X 1-6H	1.400 (35.6)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
049	19	F	M28 X 1-6H	1.400 (35.6)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
050	19	F	M28 X 1-6H	1.400 (35.6)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
051	19	F	M28 X 1-6H	1.400 (35.6)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
052	19	F	M28 X 1-6H	1.400 (35.6)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
053	19	F	M28 X 1-6H	1.400 (35.6)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
054	19	F	M28 X 1-6H	1.400 (35.6)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
055	19	F	M28 X 1-6H	1.400 (35.6)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
056	19	F	M28 X 1-6H	1.400 (35.6)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
057	19	F	M28 X 1-6H	1.400 (35.6)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
058	19	F	M28 X 1-6H	1.400 (35.6)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 1819

Straight EMI/RFI Env. Backshell

TX Series • MIL-DTL-38999 Series III Style Connectors

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
								Min	Max
059	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
060	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
061	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
062	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.062 (27.0)	4.500 (114.3)	.250 (6.4)	.375 (9.5)
063	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
064	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
065	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
066	21	G	M31 X 1-6H	1.550 (39.4)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
067	21	G	M31 X 1-6H	1.550 (39.4)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
068	21	G	M31 X 1-6H	1.550 (39.4)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
069	21	G	M31 X 1-6H	1.550 (39.4)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
070	21	G	M31 X 1-6H	1.550 (39.4)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
071	21	G	M31 X 1-6H	1.550 (39.4)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
072	21	G	M31 X 1-6H	1.550 (39.4)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
073	21	G	M31 X 1-6H	1.550 (39.4)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
074	21	G	M31 X 1-6H	1.550 (39.4)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
075	21	G	M31 X 1-6H	1.550 (39.4)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
076	21	G	M31 X 1-6H	1.550 (39.4)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
077	21	G	M31 X 1-6H	1.550 (39.4)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
078	21	G	M31 X 1-6H	1.550 (39.4)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
079	21	G	M31 X 1-6H	1.550 (39.4)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
080	21	G	M31 X 1-6H	1.550 (39.4)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
081	21	G	M31 X 1-6H	1.550 (39.4)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)
082	21	G	M31 X 1-6H	1.550 (39.4)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
083	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.062 (27.0)	1.500 (38.1)	.250 (6.4)	.375 (9.5)
084	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.062 (27.0)	2.500 (63.5)	.250 (6.4)	.375 (9.5)
085	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.062 (27.0)	3.500 (88.9)	.250 (6.4)	.375 (9.5)
086	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.062 (27.0)	4.500 (114.3)	.250 (6.4)	.375 (9.5)
087	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
088	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
089	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
090	23	H	M34 X 1-6H	1.650 (41.9)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
091	23	H	M34 X 1-6H	1.650 (41.9)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
092	23	H	M34 X 1-6H	1.650 (41.9)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
093	23	H	M34 X 1-6H	1.650 (41.9)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
094	23	H	M34 X 1-6H	1.650 (41.9)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
095	23	H	M34 X 1-6H	1.650 (41.9)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
096	23	H	M34 X 1-6H	1.650 (41.9)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
097	23	H	M34 X 1-6H	1.650 (41.9)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
098	23	H	M34 X 1-6H	1.650 (41.9)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
099	23	H	M34 X 1-6H	1.650 (41.9)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
100	23	H	M34 X 1-6H	1.650 (41.9)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
101	23	H	M34 X 1-6H	1.650 (41.9)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
102	23	H	M34 X 1-6H	1.650 (41.9)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
103	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
104	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
105	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)

Dimensions are in inches (mm).

(Continued on next page)

TX

Backshell Dimensions (Continued from previous page)

Dash No.	Shell Size	Military Shell Size	V Thread Class 2B	D	T	B	L	CC Cable Clearance	
								Min	Max
106	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
107	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.750 (44.5)	1.500 (38.1)	1.000 (25.4)	1.125 (28.6)
108	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.750 (44.5)	2.500 (63.5)	1.000 (25.4)	1.125 (28.6)
109	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.750 (44.5)	3.500 (88.9)	1.000 (25.4)	1.125 (28.6)
110	23	H	M34 X 1-6H	1.650 (41.9)	1.625 (41.3)	1.750 (44.5)	4.500 (114.3)	1.000 (25.4)	1.125 (28.6)
111	25	J	M37 X 1-6H	1.850 (47.0)	1.250 (31.8)	1.156 (29.4)	1.500 (38.1)	.375 (9.5)	.500 (12.7)
112	25	J	M37 X 1-6H	1.850 (47.0)	1.250 (31.8)	1.156 (29.4)	2.500 (63.5)	.375 (9.5)	.500 (12.7)
113	25	J	M37 X 1-6H	1.850 (47.0)	1.250 (31.8)	1.156 (29.4)	3.500 (88.9)	.375 (9.5)	.500 (12.7)
114	25	J	M37 X 1-6H	1.850 (47.0)	1.250 (31.8)	1.156 (29.4)	4.500 (114.3)	.375 (9.5)	.500 (12.7)
115	25	J	M37 X 1-6H	1.850 (47.0)	1.312 (33.3)	1.250 (31.8)	1.500 (38.1)	.500 (12.7)	.625 (15.9)
116	25	J	M37 X 1-6H	1.850 (47.0)	1.312 (33.3)	1.250 (31.8)	2.500 (63.5)	.500 (12.7)	.625 (15.9)
117	25	J	M37 X 1-6H	1.850 (47.0)	1.312 (33.3)	1.250 (31.8)	3.500 (88.9)	.500 (12.7)	.625 (15.9)
118	25	J	M37 X 1-6H	1.850 (47.0)	1.312 (33.3)	1.250 (31.8)	4.500 (114.3)	.500 (12.7)	.625 (15.9)
119	25	J	M37 X 1-6H	1.850 (47.0)	1.375 (34.9)	1.375 (34.9)	1.500 (38.1)	.625 (15.9)	.750 (19.1)
120	25	J	M37 X 1-6H	1.850 (47.0)	1.375 (34.9)	1.375 (34.9)	2.500 (63.5)	.625 (15.9)	.750 (19.1)
121	25	J	M37 X 1-6H	1.850 (47.0)	1.375 (34.9)	1.375 (34.9)	3.500 (88.9)	.625 (15.9)	.750 (19.1)
122	25	J	M37 X 1-6H	1.850 (47.0)	1.375 (34.9)	1.375 (34.9)	4.500 (114.3)	.625 (15.9)	.750 (19.1)
123	25	J	M37 X 1-6H	1.850 (47.0)	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	.750 (19.1)	.875 (22.2)
124	25	J	M37 X 1-6H	1.850 (47.0)	1.500 (38.1)	1.500 (38.1)	2.500 (63.5)	.750 (19.1)	.875 (22.2)
125	25	J	M37 X 1-6H	1.850 (47.0)	1.500 (38.1)	1.500 (38.1)	3.500 (88.9)	.750 (19.1)	.875 (22.2)
126	25	J	M37 X 1-6H	1.850 (47.0)	1.500 (38.1)	1.500 (38.1)	4.500 (114.3)	.750 (19.1)	.875 (22.2)
127	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.625 (41.3)	1.500 (38.1)	.875 (22.2)	1.000 (25.4)
128	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.625 (41.3)	2.500 (63.5)	.875 (22.2)	1.000 (25.4)
129	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.625 (41.3)	3.500 (88.9)	.875 (22.2)	1.000 (25.4)
130	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.625 (41.3)	4.500 (114.3)	.875 (22.2)	1.000 (25.4)
131	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.750 (44.5)	1.500 (38.1)	1.000 (25.4)	1.125 (28.6)
132	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.750 (44.5)	2.500 (63.5)	1.000 (25.4)	1.125 (28.6)
133	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.750 (44.5)	3.500 (88.9)	1.000 (25.4)	1.125 (28.6)
134	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.750 (44.5)	4.500 (114.3)	1.000 (25.4)	1.125 (28.6)
135	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.875 (47.6)	1.500 (38.1)	1.125 (28.6)	1.250 (31.8)
136	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.875 (47.6)	2.500 (63.5)	1.125 (28.6)	1.250 (31.8)
137	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.875 (47.6)	3.500 (88.9)	1.125 (28.6)	1.250 (31.8)
138	25	J	M37 X 1-6H	1.850 (47.0)	1.625 (41.3)	1.875 (47.6)	4.500 (114.3)	1.125 (28.6)	1.250 (31.8)

Dimensions are in inches (mm).

TX

