

Environmental Backshell

QS Series • MIL-DTL-22992 QWLD Type Connectors




QSE2 - 015 C P

- 1 **BASIC PART NUMBER**
QSE2 Straight environmental backshell
- 2 **DASH NO.**
See Backshell Dimensions table, next page
- 3 **MATERIAL & FINISH**
C Aluminum, conductive (olive drab cadmium)
N Aluminum, non-conductive (anodized)
- 4 **OPTIONAL ATTACHED COVER (OMIT FOR NONE)**
P Plug cover
R Receptacle cover

Note: See part builder (p. W-9) for additional kit options.

QSE2 Compatibility

Compatible Brands	Connectors
MIL-DTL-22992 QWLD	MS17343, MS17344, MS17345, MS17347
Amphenol	10-1940, 10-1941, 10-1943, 10-1946, 88-1940, 88-1941, 88-1943, 88-1946
ITT Cannon	CWLD00, CWLD01, CWLD06, CWLD07

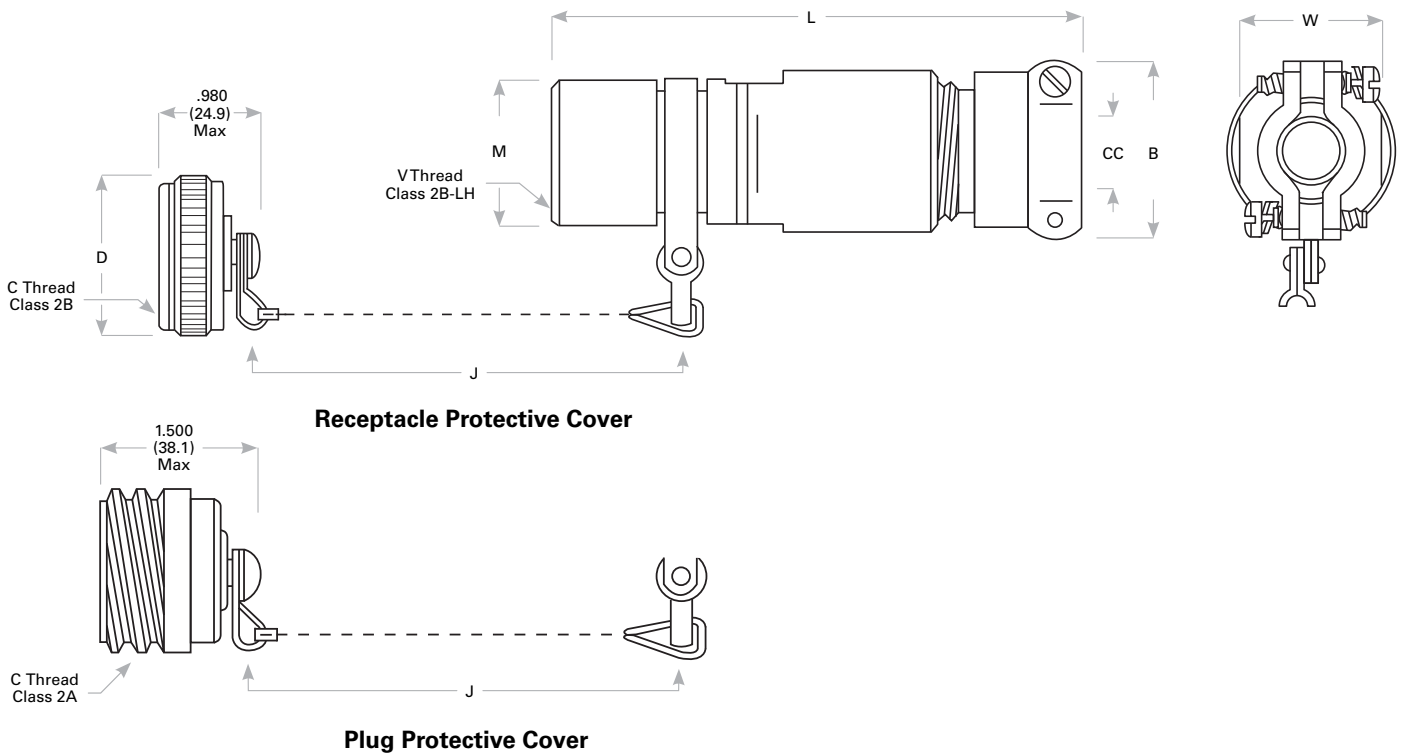

Rev. 2030

Backshell Dimensions

Dash No.	Shell Size	W	C Thread Class 2A/B	J Approx	V Thread Class 2B-LH	L Max	M	B	CC Cable Range	
									Max Dia	Min Dia
001	12	.812 (20.6)	.8750-0.1P-0.2L DS	5.000 (127.0)	.750-20 UNEF	4.275 (108.6)	.938 (23.8)	1.375 (34.9)	.530 (13.5)	.436 (11.1)
002	12	.938 (23.8)	.8750-0.1P-0.2L DS	5.000 (127.0)	.750-20 UNEF	3.678 (93.4)	.938 (23.8)	1.125 (28.6)	.500 (12.7)	.406 (10.3)
003	12	.812 (20.6)	.8750-0.1P-0.2L DS	5.000 (127.0)	.750-20 UNEF	4.275 (108.6)	.938 (23.8)	1.375 (34.9)	.405 (10.3)	.311 (7.9)
004	12	.812 (20.6)	.8750-0.1P-0.2L DS	5.000 (127.0)	.750-20 UNEF	3.365 (85.5)	.938 (23.8)	1.062 (27.0)	.375 (9.5)	.281 (7.1)
005	12	.812 (20.6)	.8750-0.1P-0.2L DS	5.000 (127.0)	.750-20 UNEF	3.365 (85.5)	.938 (23.8)	1.062 (27.0)	.281 (7.1)	.188 (4.8)
006	12	.812 (20.6)	.8750-0.1P-0.2L DS	5.000 (127.0)	.750-20 UNEF	3.182 (80.8)	.938 (23.8)	.938 (23.8)	.250 (6.4)	.156 (4.0)
007	14	1.125 (28.6)	1.0000-0.1P-0.2L DS	5.000 (127.0)	.875-20 UNEF	4.489 (114.0)	1.062 (27.0)	1.562 (39.7)	.625 (15.9)	.531 (13.5)
008	14	1.062 (27.0)	1.0000-0.1P-0.2L DS	5.000 (127.0)	.875-20 UNEF	4.177 (106.1)	1.062 (27.0)	1.375 (34.9)	.605 (15.4)	.511 (13.0)
009	14	1.062 (27.0)	1.0000-0.1P-0.2L DS	5.000 (127.0)	.875-20 UNEF	4.177 (106.1)	1.062 (27.0)	1.375 (34.9)	.530 (13.5)	.436 (11.1)
010	14	.938 (23.8)	1.0000-0.1P-0.2L DS	5.000 (127.0)	.875-20 UNEF	3.678 (93.4)	1.062 (27.0)	1.125 (28.6)	.438 (11.1)	.344 (8.7)
011	14	1.062 (27.0)	1.0000-0.1P-0.2L DS	5.000 (127.0)	.875-20 UNEF	4.177 (106.1)	1.062 (27.0)	1.375 (34.9)	.405 (10.3)	.311 (7.9)
012	16	1.062 (27.0)	1.1250-0.1P-0.2L DS	5.000 (127.0)	1.000-20 UNEF	4.177 (106.1)	1.188 (30.2)	1.375 (34.9)	.605 (15.4)	.511 (13.0)
013	16	1.062 (27.0)	1.1250-0.1P-0.2L DS	5.000 (127.0)	1.000-20 UNEF	4.177 (106.1)	1.188 (30.2)	1.375 (34.9)	.530 (13.5)	.436 (11.1)
014	16	1.062 (27.0)	1.1250-0.1P-0.2L DS	5.000 (127.0)	1.000-20 UNEF	4.177 (106.1)	1.312 (33.3)	1.375 (34.9)	.405 (10.3)	.311 (7.9)
015	18	1.250 (31.8)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.584 (116.4)	1.312 (33.3)	1.688 (42.9)	.828 (21.0)	.715 (18.2)
016	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.489 (114.0)	1.312 (33.3)	1.562 (39.7)	.699 (17.8)	.605 (15.4)
017	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.489 (114.0)	1.312 (33.3)	1.562 (39.7)	.625 (15.9)	.531 (13.5)
018	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.177 (106.1)	1.312 (33.3)	1.375 (34.9)	.605 (15.4)	.511 (13.0)
019	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.177 (106.1)	1.312 (33.3)	1.375 (34.9)	.530 (13.5)	.436 (11.1)
020	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.489 (114.0)	1.312 (33.3)	1.562 (39.7)	.500 (12.7)	.406 (10.3)
021	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	4.489 (114.0)	1.312 (33.3)	1.562 (39.7)	.455 (11.6)	.361 (9.2)
022	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	3.901 (99.1)	1.312 (33.3)	1.062 (27.0)	.375 (9.5)	.281 (7.1)
023	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	3.932 (99.9)	1.312 (33.3)	1.125 (28.6)	.375 (9.5)	.281 (7.1)
024	18	1.125 (28.6)	1.2500-0.1P-0.2L DS	5.000 (127.0)	1.125-18UNEF	3.901 (99.1)	1.312 (33.3)	1.062 (27.0)	.281 (7.1)	.188 (4.8)
025	20	1.375 (34.9)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.896 (124.4)	1.438 (36.5)	2.125 (54.0)	1.055 (26.8)	.930 (23.6)
026	20	1.375 (34.9)	1.3750-0.1P-0.2L DS	5.000 (152.4)	1.250-18UNEF	4.896 (124.4)	1.438 (36.5)	2.125 (54.0)	1.000 (25.4)	.875 (22.2)
027	20	1.375 (34.9)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.647 (118.0)	1.438 (36.5)	1.812 (46.0)	.900 (22.9)	.787 (20.0)
028	20	1.250 (31.8)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.615 (117.2)	1.438 (36.5)	1.688 (42.9)	.828 (21.0)	.715 (18.2)
029	20	1.375 (34.9)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.647 (118.0)	1.438 (36.5)	1.812 (46.0)	.750 (19.1)	.637 (16.2)
030	20	1.250 (31.8)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.489 (114.0)	1.438 (36.5)	1.562 (39.7)	.699 (17.8)	.605 (15.4)
031	20	1.250 (31.8)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.308 (109.4)	1.438 (36.5)	1.375 (34.9)	.605 (15.4)	.511 (13.0)
032	20	1.250 (31.8)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.615 (117.2)	1.438 (36.5)	1.688 (42.9)	.562 (14.3)	.449 (11.4)
033	20	1.250 (31.8)	1.3750-0.1P-0.2L DS	5.000 (127.0)	1.250-18UNEF	4.489 (114.0)	1.438 (36.5)	1.562 (39.7)	.455 (11.6)	.361 (9.2)
034	22	1.625 (41.3)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.896 (124.4)	1.562 (39.7)	2.125 (54.0)	1.109 (28.2)	.984 (25.0)
035	22	1.625 (41.3)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.896 (124.4)	1.562 (39.7)	2.125 (54.0)	1.000 (25.4)	.875 (22.2)
036	22	1.375 (34.9)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.647 (118.0)	1.562 (39.7)	1.812 (46.0)	.900 (22.9)	.787 (20.0)
037	22	1.406 (35.7)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.306 (109.4)	1.562 (39.7)	1.375 (34.9)	.828 (21.0)	.715 (18.2)
038	22	1.375 (34.9)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.647 (118.0)	1.562 (39.7)	1.812 (46.0)	.805 (20.5)	.692 (17.6)
039	22	1.375 (34.9)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.647 (118.0)	1.562 (39.7)	1.812 (46.0)	.750 (19.1)	.637 (16.2)
040	22	1.406 (35.7)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.647 (118.0)	1.562 (39.7)	1.812 (46.0)	.562 (14.3)	.449 (11.4)
041	22	1.375 (34.9)	1.5000-0.1P-0.2L DS	6.000 (152.4)	1.375-18UNEF	4.306 (109.4)	1.562 (39.7)	1.375 (34.9)	.405 (10.3)	.311 (7.9)
042	24	1.875 (47.6)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.959 (126.0)	1.812 (46.0)	2.625 (66.7)	1.375 (34.9)	1.250 (31.8)
043	24	1.875 (47.6)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.959 (126.0)	1.812 (46.0)	2.469 (62.7)	1.310 (33.3)	1.185 (30.1)
044	24	1.875 (47.6)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.959 (126.0)	1.812 (46.0)	2.469 (62.7)	1.230 (31.2)	1.105 (28.1)
045	24	1.875 (47.6)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.959 (126.0)	1.812 (46.0)	2.469 (62.7)	1.180 (30.0)	1.055 (26.8)
046	24	1.625 (41.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.896 (124.4)	1.812 (46.0)	2.125 (54.0)	1.109 (28.2)	.984 (25.0)
047	24	1.625 (41.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.896 (124.4)	1.812 (46.0)	2.125 (54.0)	1.055 (26.8)	.930 (23.6)
048	24	1.625 (41.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.896 (124.4)	1.812 (46.0)	2.125 (54.0)	1.000 (25.4)	.675 (17.2)
049	24	1.625 (41.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.647 (118.0)	1.812 (46.0)	1.812 (46.0)	.970 (24.6)	.857 (21.8)

Dimensions are in inches (mm).

(Continued on next page)

Rev. 2030

Environmental Backshell

QS Series • MIL-DTL-22992 QWLD Type Connectors

Backshell Dimensions (Continued from previous page)

Dash No	Shell Size	W	C Thread Class 2A/B	J Approx	V Thread Class 2B-LH	L Max	M Dia	B	CC Cable Range	
									Max Dia	Min Dia
050	24	1.312 (33.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.647 (118.0)	1.812 (46.0)	1.812 (46.0)	.900 (22.9)	.787 (20.0)
051	24	1.546 (39.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.896 (124.4)	1.812 (46.0)	2.125 (54.0)	.880 (22.4)	.755 (19.2)
052	24	1.188 (30.2)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.542 (115.4)	1.812 (46.0)	1.688 (42.9)	.828 (21.0)	.715 (18.2)
053	24	1.312 (33.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.647 (118.0)	1.812 (46.0)	1.812 (46.0)	.805 (20.5)	.692 (17.6)
054	24	1.312 (33.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.647 (118.0)	1.812 (46.0)	1.812 (46.0)	.750 (19.1)	.637 (16.2)
055	24	1.312 (33.3)	1.7500-0.1P-0.2L DS	6.000 (152.4)	1.625-18UNEF	4.647 (118.0)	1.812 (46.0)	1.812 (46.0)	.630 (16.0)	.517 (13.1)
056	28	2.000 (50.8)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	5.021 (127.5)	2.062 (52.4)	2.625 (66.7)	1.531 (38.9)	1.406 (35.7)
057	28	2.000 (50.8)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	5.021 (127.5)	2.062 (52.4)	2.625 (66.7)	1.445 (36.7)	1.320 (33.5)
058	28	2.000 (50.8)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	5.021 (127.5)	2.062 (52.4)	2.625 (66.7)	1.375 (34.9)	1.250 (31.8)
059	28	1.780 (45.2)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.959 (126.0)	2.062 (52.4)	2.469 (62.7)	1.310 (33.3)	1.185 (30.1)
060	28	1.780 (45.2)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.959 (126.0)	2.062 (52.4)	2.469 (62.7)	1.230 (31.2)	1.105 (28.1)
061	28	1.780 (45.2)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.959 (126.0)	2.062 (52.4)	2.469 (62.7)	1.180 (30.0)	1.055 (26.8)
062	28	1.546 (39.3)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.896 (124.4)	2.062 (52.4)	2.125 (54.0)	1.109 (28.2)	.984 (25.0)
063	28	1.546 (39.3)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.896 (124.4)	2.062 (52.4)	2.125 (54.0)	1.000 (25.4)	.875 (22.2)
064	28	1.312 (33.3)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.647 (118.0)	2.062 (52.4)	1.812 (46.0)	.970 (24.6)	.857 (21.8)
065	28	1.546 (39.3)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.896 (124.4)	2.062 (52.4)	2.125 (54.0)	.880 (22.4)	.755 (19.2)
066	28	1.312 (33.3)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.647 (118.0)	2.062 (52.4)	1.812 (46.0)	.750 (19.1)	.637 (16.2)
067	28	1.312 (33.3)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.647 (118.0)	2.062 (52.4)	1.812 (46.0)	.680 (17.3)	.567 (14.4)
068	28	1.000 (25.4)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.431 (112.6)	2.062 (52.4)	1.375 (34.9)	.530 (13.5)	.436 (11.1)
069	28	.875 (22.2)	2.0000-0.1P-0.2L DS	6.000 (152.4)	1.875-16UN	4.229 (107.4)	2.062 (52.4)	1.125 (28.6)	.375 (9.5)	.281 (7.1)
070	32	2.438 (61.9)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.385 (136.8)	2.312 (58.7)	3.171 (80.5)	1.828 (46.4)	1.700 (43.2)
071	32	2.438 (61.9)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.385 (136.8)	2.312 (58.7)	3.171 (80.5)	1.730 (43.9)	1.605 (40.8)
072	32	2.250 (57.2)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.083 (129.1)	2.312 (58.7)	2.953 (75.0)	1.656 (42.1)	1.531 (38.9)
073	32	2.250 (57.2)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.083 (129.1)	2.312 (58.7)	2.953 (75.0)	1.562 (39.7)	1.437 (36.5)
074	32	2.000 (50.8)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.021 (127.5)	2.312 (58.7)	2.625 (66.7)	1.531 (38.9)	1.406 (35.7)
075	32	2.000 (50.8)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.021 (127.5)	2.312 (58.7)	2.625 (66.7)	1.445 (36.7)	1.320 (33.5)
076	32	2.000 (50.8)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	5.021 (127.5)	2.312 (58.7)	2.625 (66.7)	1.375 (34.9)	1.250 (31.8)
077	32	1.780 (45.2)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.959 (126.0)	2.312 (58.7)	2.469 (62.7)	1.230 (31.2)	1.150 (29.2)
078	32	1.780 (45.2)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.959 (126.0)	2.312 (58.7)	2.469 (62.7)	1.130 (28.7)	1.005 (25.5)
079	32	1.546 (39.3)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.896 (124.4)	2.312 (58.7)	2.125 (54.0)	1.109 (28.2)	.984 (25.0)
080	32	1.546 (39.3)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.896 (124.4)	2.312 (58.7)	2.125 (54.0)	1.055 (26.8)	.930 (23.6)
081	32	1.312 (33.3)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.647 (118.0)	2.312 (58.7)	1.812 (46.0)	.970 (24.6)	.857 (21.8)
082	32	1.546 (39.3)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.896 (124.4)	2.312 (58.7)	2.125 (54.0)	.880 (22.4)	.755 (19.2)
083	32	1.312 (33.3)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.647 (118.0)	2.312 (58.7)	1.812 (46.0)	.750 (19.1)	.637 (16.2)
084	32	1.000 (25.4)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.431 (112.6)	2.312 (58.7)	1.375 (34.9)	.530 (13.5)	.436 (11.1)
085	32	.875 (22.2)	2.2500-0.1P-0.2L DS	6.000 (152.4)	2.0625-16UN	4.276 (108.6)	2.312 (58.7)	1.125 (28.6)	.375 (9.5)	.281 (7.1)
086	36	2.750 (69.9)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.385 (136.8)	2.562 (65.1)	3.375 (85.7)	2.062 (52.4)	1.917 (48.7)
087	36	2.438 (61.9)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.354 (136.0)	2.562 (65.1)	3.171 (80.5)	1.984 (50.4)	1.859 (47.2)
088	36	2.438 (61.9)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.354 (136.0)	2.562 (65.1)	3.171 (80.5)	1.900 (48.3)	1.775 (45.1)
089	36	2.438 (61.9)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.354 (136.0)	2.562 (65.1)	3.171 (80.5)	1.825 (46.4)	1.799 (45.7)
090	36	2.438 (61.9)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.354 (136.0)	2.562 (65.1)	3.171 (80.5)	1.730 (43.9)	1.605 (40.8)
091	36	2.250 (57.2)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.083 (129.1)	2.562 (65.1)	2.953 (75.0)	1.656 (42.1)	1.531 (38.9)
092	36	2.250 (57.2)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.083 (129.1)	2.562 (65.1)	2.953 (75.0)	1.562 (39.7)	1.437 (36.5)
093	36	2.000 (50.8)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.021 (127.5)	2.562 (65.1)	2.625 (66.7)	1.445 (36.7)	1.320 (33.5)
094	36	2.000 (50.8)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	5.021 (127.5)	2.562 (65.1)	2.625 (66.7)	1.375 (34.9)	1.250 (31.8)
095	36	1.780 (45.2)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	4.959 (126.0)	2.562 (65.1)	2.469 (62.7)	1.310 (33.3)	1.185 (30.1)
096	36	1.780 (45.2)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	4.959 (126.0)	2.562 (65.1)	2.469 (62.7)	1.230 (31.2)	1.105 (28.1)
097	36	1.780 (45.2)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	4.959 (126.0)	2.562 (65.1)	2.469 (62.7)	1.180 (30.0)	1.055 (26.8)
098	36	1.546 (39.3)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	4.896 (124.4)	2.562 (65.1)	2.125 (54.0)	1.109 (28.2)	.984 (25.0)
099	36	1.312 (33.3)	2.5000-0.1P-0.2L DS	6.000 (152.4)	2.3125-16UN	4.651 (118.1)	2.562 (65.1)	1.812 (46.0)	.970 (24.6)	.857 (21.8)

Dimensions are in inches (mm).

Rev. 2030