

# Boot Adapter

TM Series • MIL-DTL-5015 Crimp Type Connectors



## TMAB - 16 N - K2

- 1 **BASIC PART NUMBER**  
**TMAB** Boot adapter
- 2 **SHELL SIZE**  
 See Adapter Dimensions table below
- 3 **MATERIAL & FINISH**  
**N** Aluminum, electroless nickel  
**W** Aluminum, olive drab cadmium
- 4 **OPTIONAL BOOT KIT (OMIT FOR NONE)**  
**K2** Includes recommended straight shrink boot in standard material 100, p. K-47  
**K4** Includes recommended 90° shrink boot in standard material 100, p. K-48

### TMAB Compatibility



Compatible Brands	Connectors
MIL-DTL-5015 Crimp	MS3450, MS3451, MS3454, MS3456, MS3459
Aero Electric	AE550, AE551, AE554, AE556, AE559
Amphenol / Matrix	9440, 9441, 9444, 9446, 9816
J-Tech / Conesys	DC60, DC61, DC62, DC63
ITT Cannon	CV3450, CV3451, CV3454, CV3456, CV3459

Note: See part builder (p. K-11) for additional kit options.

### Adapter Dimensions

Shell Size	CC Cable Clearance	M	D Max	L	V Thread Class 2B
8	.250 (6.4)	.533 (13.5)	.630 (16.0)	.832 (21.1)	.500-20 UNF
10	.355 (9.0)	.605 (15.4)	.770 (19.6)	.832 (21.1)	.625-24 UNEF
12	.491 (12.5)	.774 (19.7)	.860 (21.8)	.832 (21.1)	.750-20 UNEF
14	.565 (14.4)	.838 (21.3)	1.020 (25.9)	.832 (21.1)	.875-20 UNEF
16	.690 (17.5)	.963 (24.5)	1.210 (30.7)	.832 (21.1)	1.000-20 UNEF
18	.769 (19.5)	1.042 (26.5)	1.230 (31.2)	.832 (21.1)	1.062-18 UNEF
20	.894 (22.7)	1.217 (30.9)	1.360 (34.5)	.832 (21.1)	1.188-18 UNEF
22	1.019 (25.9)	1.355 (34.4)	1.480 (37.6)	.832 (21.1)	1.313-18 UNEF
24	1.134 (28.8)	1.443 (36.7)	1.730 (43.9)	.832 (21.1)	1.438-18 UNEF
28	1.369 (34.8)	1.709 (43.4)	1.970 (50.0)	.994 (25.3)	1.750-18 UNS
32	1.615 (41.0)	1.919 (48.7)	2.220 (56.4)	.994 (25.3)	2.000-18 UNS
36	1.830 (46.5)	2.169 (55.1)	2.470 (62.7)	.994 (25.3)	2.250-16 UN

Dimensions are in inches (mm).

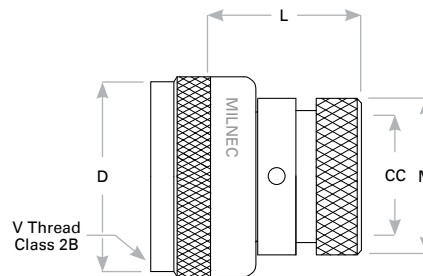

Rev. 2231