


TMMB - 16 - A

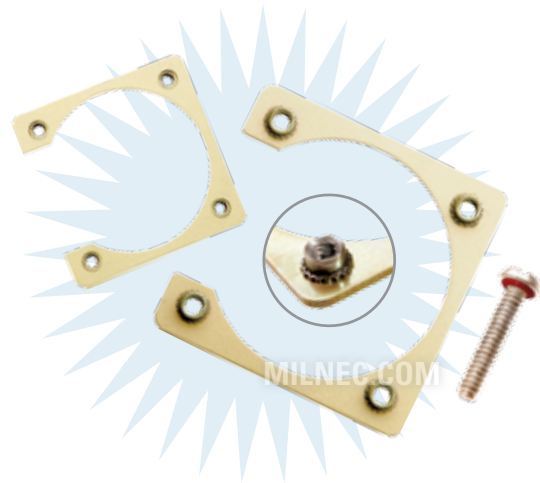

- 1 **BASIC PART NUMBER**
TMMB Mounting bracket, aluminium alloy with SST locking nuts
- 2 **SHELL SIZE**
 See Bracket Dimensions table below
- 3 **OPTIONAL ACCESSORY KIT (OMIT FOR NONE)**
 - A** Self-sealing SST fillister head screws (4x)
 - B** A kit + environmental gasket
 - C** A kit + EMI/RFI shielded gasket
 - D** A kit + fluorosilicone EMI/RFI gasket

Note: See part builder (p. K-11) for additional kit options.


TMMB Compatibility

Compatible Brands	Receptacles
MIL-DTL-5015 Crimp	MS3450, MS3452
Aero Electric	AE550, AE552
Amphenol / Matrix	9440, 9442
J-Tech / Conesys	DC60, DC61
ITT Cannon	CV3450, CV3452

Bracket Dimensions

Shell Size	W	S	H	T	N	F	Screw Size	Y Thread
10	1.019 (25.9)	.719 (18.3)	.720 (18.3)	.433 (11.0)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
12	1.104 (28.0)	.812 (20.6)	.855 (21.7)	.530 (13.5)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
14	1.198 (30.4)	.906 (23.0)	.984 (25.0)	.624 (15.8)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
16	1.280 (32.5)	.969 (24.6)	1.094 (27.8)	.687 (17.4)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
18	1.406 (35.7)	1.062 (27.0)	1.220 (31.0)	.780 (19.8)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
20	1.535 (39.0)	1.156 (29.4)	1.345 (34.2)	.874 (22.2)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
22	1.665 (42.3)	1.250 (31.8)	1.478 (37.5)	.968 (24.6)	.136 (3.5)	.040 (1.0)	#4	4-40 UNJC-3B
24	1.738 (44.1)	1.375 (34.9)	1.483 (37.7)	.907 (23.0)	.153 (3.9)	.040 (1.0)	#6	6-32 UNJC-3B
28	2.000 (50.8)	1.562 (39.7)	1.820 (46.2)	1.125 (28.6)	.153 (3.9)	.040 (1.0)	#6	6-32 UNJC-3B
32	2.312 (58.7)	1.750 (44.5)	2.062 (52.4)	1.188 (30.2)	.153 (3.9)	.040 (1.0)	#6	6-32 UNJC-3B
36	2.500 (63.5)	1.938 (49.2)	2.312 (58.7)	1.375 (34.9)	.153 (3.9)	.040 (1.0)	#6	6-32 UNJC-3B
40	2.925 (74.3)	2.188 (55.6)	2.675 (68.0)	1.500 (38.1)	.210 (5.3)	.040 (1.0)	#8	8-32 UNJC-3B

Dimensions are in inches (mm).

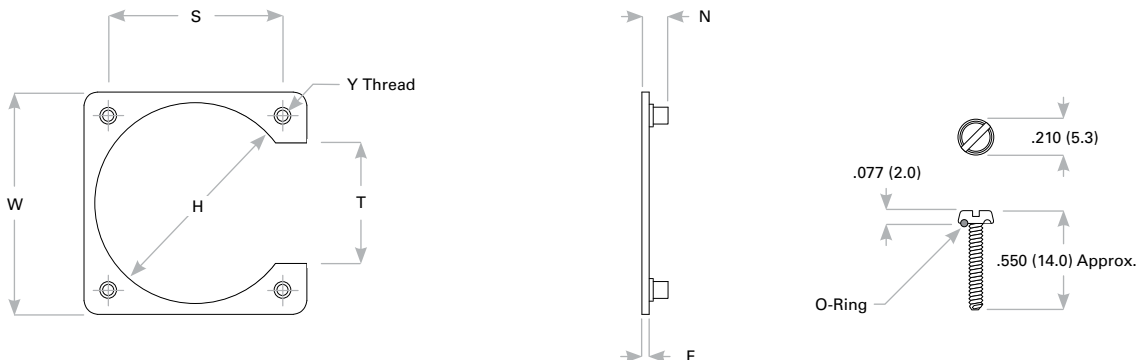

Rev. 1825