

Shorting Cap Backshell

TX Series • MIL-DTL-38999 Series III Style Connectors



TXSC - 13 - 3 K 1

- 1 **BASIC PART NUMBER**
TXSC Shorting cap backshell with O-ring sealed inspection cover
- 2 **SHELL SIZE**
See Backshell Dimensions table below
- 3 **BACKSHELL LENGTH**
Length in whole inches (1 inch = 25.4 mm)
- 4 **MATERIAL & FINISH**
K Stainless steel, passivated (firewall)
L Stainless steel, electrodeposited nickel
- 5 **ATTACHMENT STYLE**
1 No strap attachment
2 Body strap with bolt attachment


TXSC Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series III	D38999/20, D38999/24, D38999/26
Aero / Conesys	AE320, AE324, AE326
Amphenol	TVP00, TVPS00, TV06, TVS06, TV07, TVS07
Deutsch	DTS20, DTS24, DTS26
ITT Cannon	KJA0, KJA6, KJA7
Souriau	8D0, 8D1, 8D5, 8D7, 8DS00, 8DS06G, 8DS07

Backshell Dimensions

Shell Size	Military Shell Size	D	V Thread Class 2B	CC Internal Dia.	L
9	A	.600 (15.2)	M12 X 1-6H	.250 (6.4)	Ordered in whole inch increments Min = 1 inch (25.4 mm) Max = 12 inches (304.8 mm)
11	B	.717 (18.2)	M15 X 1-6H	.375 (9.5)	
13	C	.834 (21.2)	M18 X 1-6H	.500 (12.7)	
15	D	.990 (25.2)	M22 X 1-6H	.625 (15.9)	
17	E	1.107 (28.1)	M25 X 1-6H	.750 (19.1)	
19	F	1.224 (31.1)	M28 X 1-6H	.812 (20.6)	
21	G	1.341 (34.1)	M31 X 1-6H	.938 (23.8)	
23	H	1.453 (36.9)	M34 X 1-6H	1.062 (27.0)	
25	J	1.567 (39.8)	M37 X 1-6H	1.188 (30.2)	

Dimensions are in inches (mm).

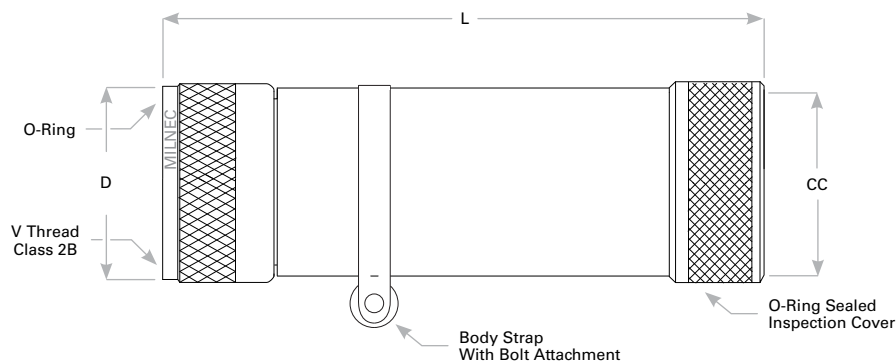

Rev. 1301.1