

CL Series • High-Power Connectors



CLCP - 44 C

- 1 BASIC PART NUMBER**

 - CLCP** Plug cover
 - CLCR** Receptacle cover

2 SHELL SIZE

See Protective Cover Dimensions table below

3 MATERIAL & FINISH

 - C** Aluminum, olive drab cadmium
(Conductive for AC applications)
 - N** Aluminum, anodized finish
(Non-conductive for DC applications)

Note: See part builder (p. M-9) for additional kit options.




Protect contacts and coupling threads

Connectors should always have a cover to protect contacts and coupling threads from physical and environmental abuse. A sash chain keeps covers close at hand when needed. All CL Series connectors come with a matching protective cover.


Protective Cover Dimensions

Shell Size	C Thread Class 2A	L ¹	E	J ¹ Chain Length	C Thread Class 2B	L ²	J ² Chain Length
28	2.000-.1428P-.2857L	2.266 (57.6)	.177 (4.5)	7.500 (190.5)	2.000-.1428P-.2857L	.969 (24.6)	6.000 (152.4)
32	2.250-.1428P-.2857L	2.266 (57.6)	.209 (5.3)	6.000 (152.4)	2.250-.1428P-.2857L	.969 (24.6)	4.500 (114.3)
44	3.000-.1428P-.2857L	2.484 (63.1)	.281 (7.1)	8.500 (215.9)	3.000-.1428P-.2857L	.969 (24.6)	7.500 (190.5)
52	3.500-.1428P-.2857L	2.484 (63.1)	.281 (7.1)	8.500 (215.9)	3.500-.1428P-.2857L	.969 (24.6)	7.500 (190.5)

Dimensions are in inches (mm).

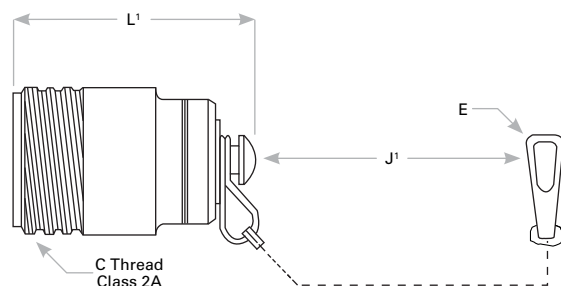

Plug Cover

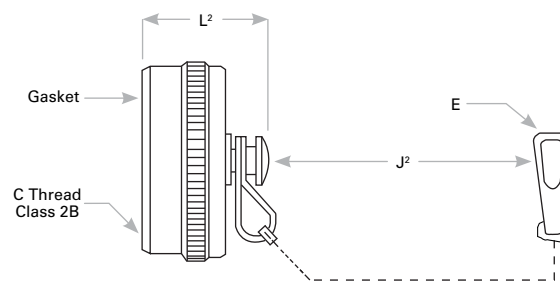

Receptacle Cover