

M85049/140 Type Sealing Heat Shrink Boot

RY85049 Series • M85049 Type Backshells



Photo for example only

RY85049/140 Compatibility

Compatible Connector Series
Supersedes MS3109

RY85049/140 - 23 H C

- 1
- 2
- 3
- 4
- BASIC PART NUMBER**

RY85049/140

M85049/140 type

Straight lipped sealing heat shrink boot

(Supersedes MS3109)
- DASH NO.**

See dimensions table below
- MATERIAL**

A Flexible polyolefin

B General purpose polyolefin

G Zero halogen polyolefin

H High performance elastomer
- ADHESIVE**

C Zero halogen, hot melt

U No adhesive


RY85049/140 Dimensions

Dash No.	H ¹	H ²	J ¹	J ²	P	R	T	HW	JW Max
23	0.840 (21.3)	0.550 (14.0)	0.660 (16.8)	0.210 (5.3)	5.300 (134.6)	1.100 (27.9)	0.060 (1.5)	0.160 (4.1)	0.040 (1.0)
24	1.000 (25.4)	0.650 (16.5)	1.000 (25.4)	0.330 (8.4)	6.000 (152.4)	1.200 (30.5)	0.060 (1.5)	0.160 (4.1)	0.060 (1.5)
25	1.300 (33.0)	0.800 (20.3)	1.300 (33.0)	0.430 (10.9)	6.000 (152.4)	1.200 (30.5)	0.060 (1.5)	0.160 (4.1)	0.060 (1.5)
26	1.700 (43.2)	0.900 (22.9)	1.700 (43.2)	0.560 (14.2)	6.900 (175.3)	1.500 (38.1)	0.060 (1.5)	0.160 (4.1)	0.080 (2.0)
27	2.100 (53.3)	1.100 (27.9)	2.100 (53.3)	0.700 (17.8)	6.900 (175.3)	1.500 (38.1)	0.060 (1.5)	0.160 (4.1)	0.080 (2.0)
28	2.850 (72.4)	1.450 (36.4)	2.850 (72.4)	0.950 (24.1)	7.240 (183.9)	1.600 (40.6)	0.060 (1.5)	0.200 (5.1)	0.100 (2.5)

Dimensions are in inches (mm).



Before Heat Activation

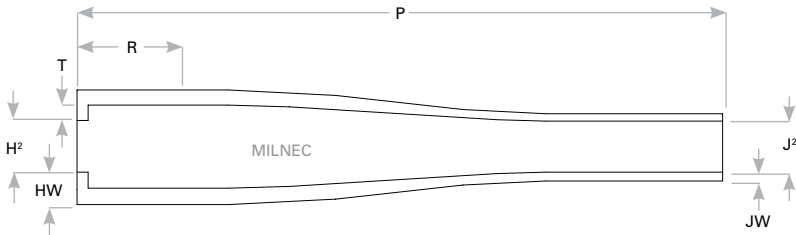

After Heat Activation