

Boot Adapter

TB Series • MIL-DTL-38999 Series IV Style Accessories



TBAB Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series IV	D38999/40, D38999/44, D38999/46, D38999/47, D38999/49
G & H Tech / Cooper	BL00, BL03, BL06, BL07, BLG6
Deutsch	DIV/40, DIV/44, DIV/45, DIV/46, DIV/48

TBAB - 15 B - K2

- 1

2

3

4
- 1

2

3

4
- BASIC PART NUMBER**

TBAB Boot adapter

SHELL SIZE

See Adapter Dimensions table below

MATERIAL & FINISH

B Aluminum, hardcoat anodize

N Aluminum, electroless nickel

W Aluminum, olive drab cadmium

G Aluminum, electroless nickel (space-grade)

OPTIONAL BOOT KIT (OMIT FOR NONE)



K2 Includes recommended straight shrink boot in standard material 100, p. S-18

K4 Includes recommended 90° shrink boot in standard material 100, p. S-19

Adapter Dimensions

Shell Size	Military Shell Size	CC Cable Clearance	L	D	U	V Thread Class 2B
9	A	.250 (6.4)	.710 (18.0)	.600 (15.2)	.533 (13.5)	M12 X 1-6H
11	B	.375 (9.5)	.710 (18.0)	.717 (18.2)	.605 (15.4)	M15 X 1-6H
13	C	.500 (12.7)	.710 (18.0)	.834 (21.2)	.774 (19.7)	M18 X 1-6H
15	D	.625 (15.9)	.710 (18.0)	.990 (25.2)	.838 (21.3)	M22 X 1-6H
17	E	.750 (19.1)	.710 (18.0)	1.107 (28.1)	.963 (24.5)	M25 X 1-6H
19	F	.812 (20.6)	.710 (18.0)	1.224 (31.1)	1.042 (26.5)	M28 X 1-6H
21	G	.938 (23.8)	.710 (18.0)	1.341 (34.1)	1.217 (30.9)	M31 X 1-6H
23	H	1.062 (27.0)	.710 (18.0)	1.453 (36.9)	1.355 (34.4)	M34 X 1-6H
25	J	1.188 (30.2)	.710 (18.0)	1.567 (39.8)	1.443 (36.7)	M37 X 1-6H

Dimensions are in inches (mm).

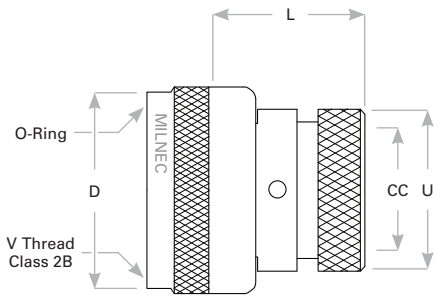

Rev. 1301.1