# **Banding Tool**

This specially designed banding tool is the only tool needed to professionally install shielding termination bands to all Milnec EMI/RFI banding adapters. The simple hand tool positions, tightens, and trims the shield termination band with just a few easy steps for a foolproof, precise installation.

#### **Features & Benefits**

- · One tool for all adapter sizes
- Ergonomic & lightweight: 1.18 lbs (0.5 kg)
- Tension range: 100 to 180 lbs (45.3 to 81.6 kg)

## **Banding Tool**

Part Number	Kit Includes The Following Items					
TB058	Banding tool for TB250 shield termination bands (.250/6.4 width)					
TB048	Banding tool for TB120 shield termination bands (.120/3.1 width)					

**Note:** Please consult an authorized distributor for full range of pneumatic banding tools for high-volume production environments.



### **Shield Termination Band**

Shield termination bands will professionally attach shielding to Milnec EMI/RFI banding boot adapters of all sizes. The bands can be quickly and reliably installed with the specially designed banding tool. Bands come pre-coiled for faster installation.


#### **Features & Benefits**


- Double-wrapped bands will accommodate diameters up to approximately 0.88 inches (22.4 mm)
- 300 series stainless steel single-piece construction




### **Band Dimensions**

Part Numb	er L	W	D	K	J	M	Н
TB250	14.252 (362.0)	.250 (6.4)	.350 (8.9)	.020 (0.5)	.130 (3.3)	.156 (4.0)	1.750 (44.5)
TB120	8.125 (206.4)	.120 (3.1)	.195 (5.0)	.015 (0.4)	.053 (1.4)	.090 (2.3)	0.860 (21.8)

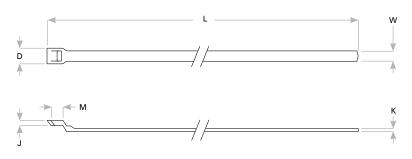



Rev. 2123



**Pre-coiled Band** 

