

Shorting Cap Backshell

DL Series • MIL-DTL-38999 Series I Style Connectors



Optional Body Strap with Bolt Attachment

DLSC - 13 - 3 N 1

- 1 **BASIC PART NUMBER**
DLSC Shorting cap backshell
- 2 **SHELL SIZE**
See Backshell Dimensions table below
- 3 **BACKSHELL LENGTH**
Length in whole inches (1 inch = 25.4 mm)
- 4 **MATERIAL & FINISH**
N Aluminum, electroless nickel
W Aluminum, olive drab cadmium
- 5 **ATTACHMENT STYLE**
1 No strap attachment
2 Body strap with bolt attachment


DLSC Compatibility

Compatible Brands	Connectors
MIL-DTL-38999 Series I	MS27466, MS27467, MS27468, MS27656
Aero / Conesys	AE156, AE167, AE166, AE168
Amphenol	LJT00, LTJQP00, LJT01, LJT06, LJTS06, LJT07
Deutsch	DJT0, DJT4, DJT6
ITT Cannon	KJA0, KJL0, KJL3, KJL6, KJL7
Souriau	8LT0, 8LT1, 8LT5, 8LT7

Backshell Dimensions

Shell Size	D	V Thread Class 2B	CC Internal Dia	L
9	.600 (15.2)	.438-28 UNEF	.250 (6.4)	Ordered in whole inch increments Min = 1 inch (25.4 mm) Max = 12 inches (304.8 mm)
11	.717 (18.2)	.562-24 UNEF	.375 (9.5)	
13	.834 (21.2)	.688-24 UNEF	.500 (12.7)	
15	.990 (25.2)	.813-20 UNEF	.625 (15.9)	
17	1.107 (28.1)	.938-20 UNEF	.750 (19.1)	
19	1.224 (31.1)	1.063-18 UNEF	.812 (20.6)	
21	1.341 (34.1)	1.188-18 UNEF	.938 (23.8)	
23	1.453 (36.9)	1.313-18 UNEF	1.062 (27.0)	
25	1.567 (39.8)	1.438-18 UNEF	1.188 (30.2)	

Dimensions are in inches (mm).

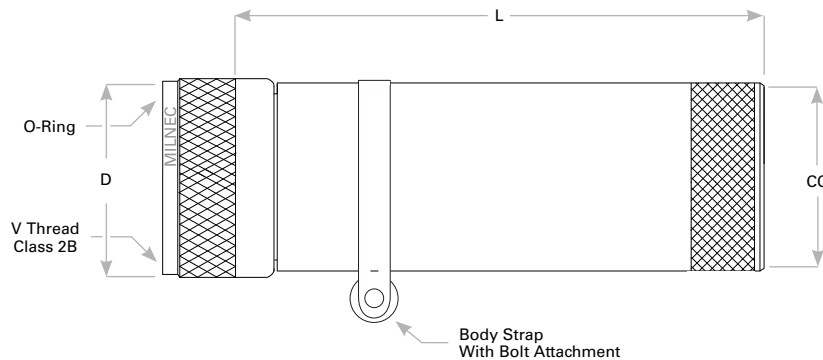

Rev. 1703